

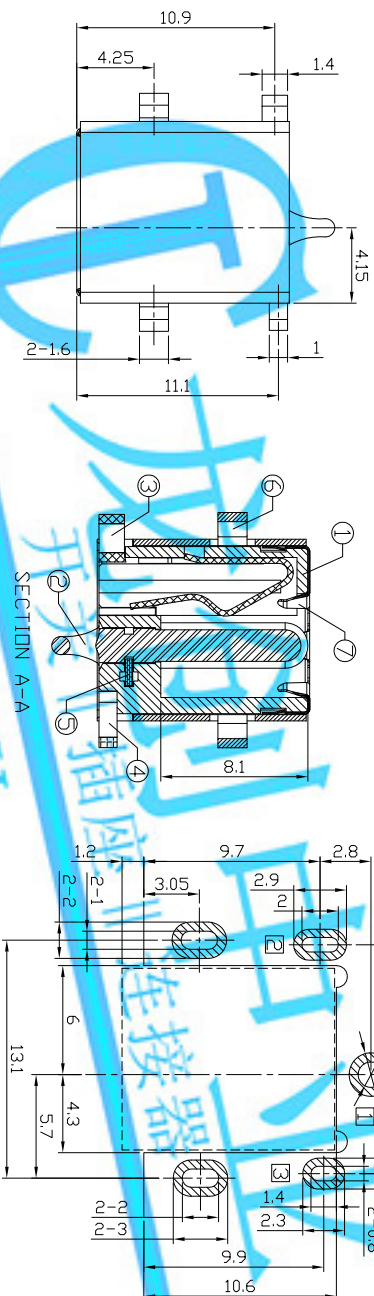




DIMENSIONS



SECTION A-A

RECOMMENDED P.C.B LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(COPPER-SIDED VIEW)

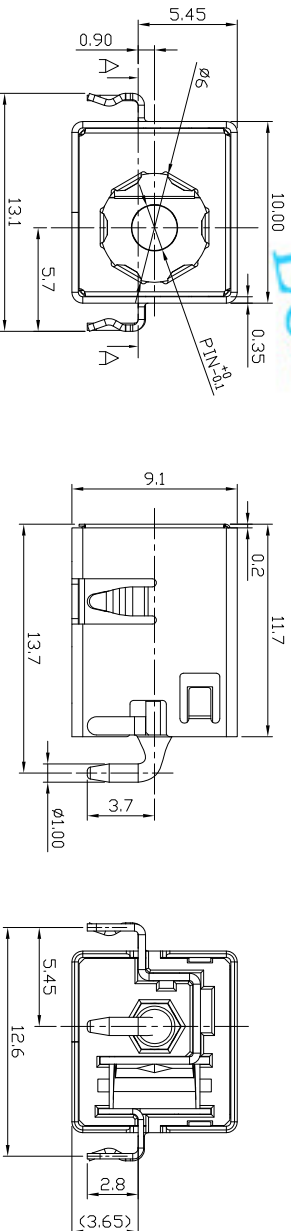

DC MATE PLUG

Model No.	G	H	J
CENTER PIN	ø1.65	ø2.0	ø2.5

○:ITEM NO. □:TERMINAL NO.

ITEM NO.	TERMINAL NO.	STAINLESS STEEL, t0.1	1	NICKEL PLATING	TOLERANCE	ANGLES	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
⑦	Ground terminal	Brass, t0.35	1	Nickel plating	±0.3	±2°	MAT'L	SEE NOTE	SMD DC POWER JACK
⑥	Shield	Brass, t0.4	1	Silver plating			FINISH	SEE NOTE	DCB0-0116A
⑤	Terminal	Brass, t0.4	1	Silver plating			DR:	2018/06/27	DWG NO.:
④	Shunt terminal	Phosphor bronze, t0.3	1	Nickel plating			CHKD:	2018/06/27	SCALE
③	Tip spring	Zinc alloy	1	Black			Q'TY	1	SHEET
②	Center pin	PA9T,PA10T UL94V-0	1	Black			APPD:	1/1	REV.
①	Housing	PA9T,PA10T UL94V-0	1	Black					CUSTOMER DRAWING
ND.	PARTS								

REV.	ECN.	NO.	APPD.