
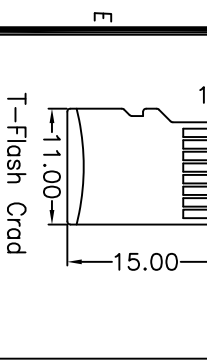



REV.	DESCRIPTION	APPD	DATE
△1	锡脚加管控尺寸1.30±0.10	伍彪	2013-11-13

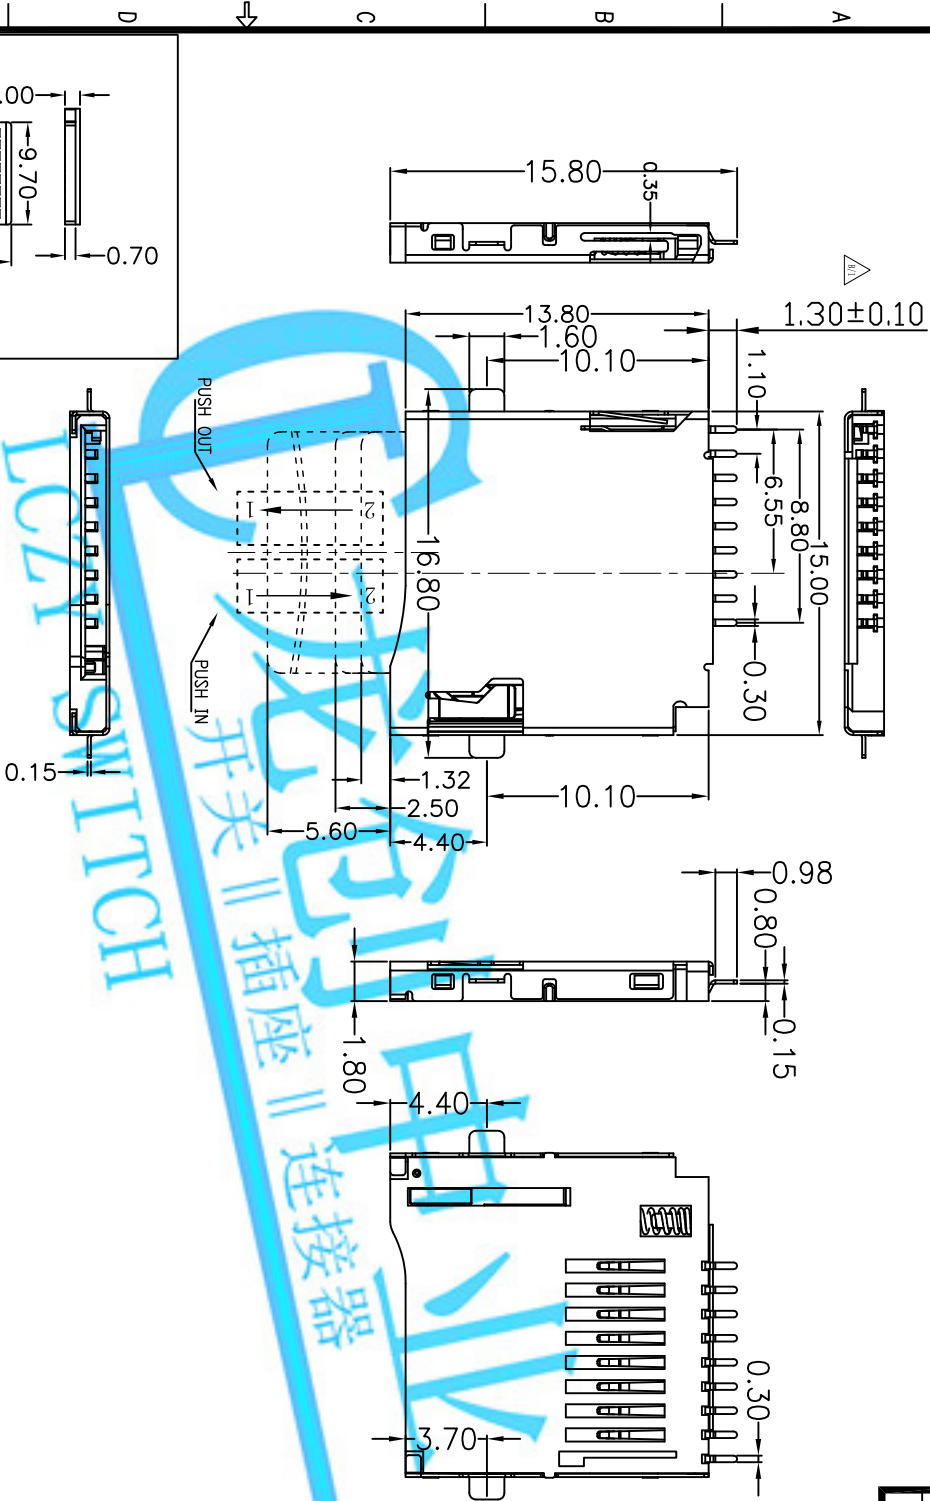

NOTES:
1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.

2.PLATING:
COVER: COPPER ALLOYS OR STEEL.
CONTACT: COPPER ALLOYS.
UNDERPLATE: NICKEL.
CONTACT AREA: GOLD OVER NICKEL.
SOLDER AREA: TIN OVER NICKEL.
3.MULTIMEDIA CARD COMPATIBLE

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

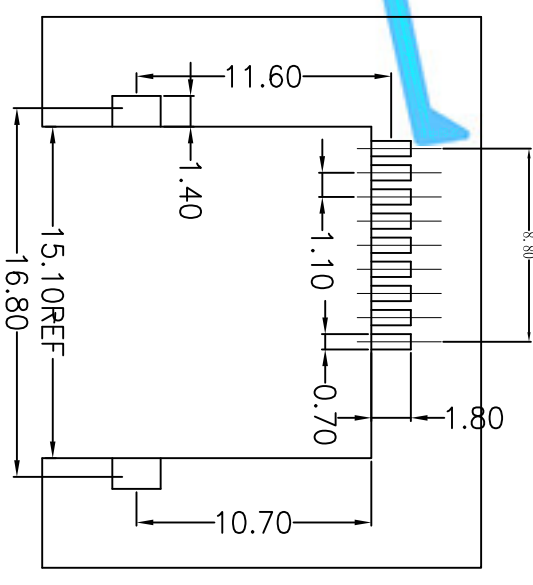

PIN NO.	NAME	TYPE	DESCRIPTION
1	DATE2	I/O/PP	DATE LINE(BIT2)
2	CD/DATE3	I/O/PP	CARD DETECT DATE LINE(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATE0	I/O/PP	DATE LINE(BIT0)
8	DATE1	I/O/PP	DATE LINE(BIT1)

PART NO: TFC6A-S1S1-2000-A		MATERIAL:	
LOT NO:		FINSH:	
UNIT: MM		SIZE: A4	
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°	
DR: 杨凯 011213		TITLE: 沉板 0.8mm T-FLASH CRAD CONN	
CHK:		DWG NO: FP-090012	
APP:		SCALE: 1:1	
		SHEET: 1 OF 1	
		REV: C/0	