

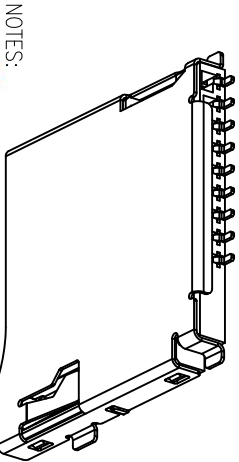


REV.	DESCRIPTION	APPD	DATE
△0.1	外壳弹片改直	杨凯	0925/10
△0.2	尺寸0.70改为0.55	杨凯	0925/10
△0.3	尺寸3.50改为2.30	刘静	1115/11
△0.4	主体底部增加孔位	杨凯	0826/12

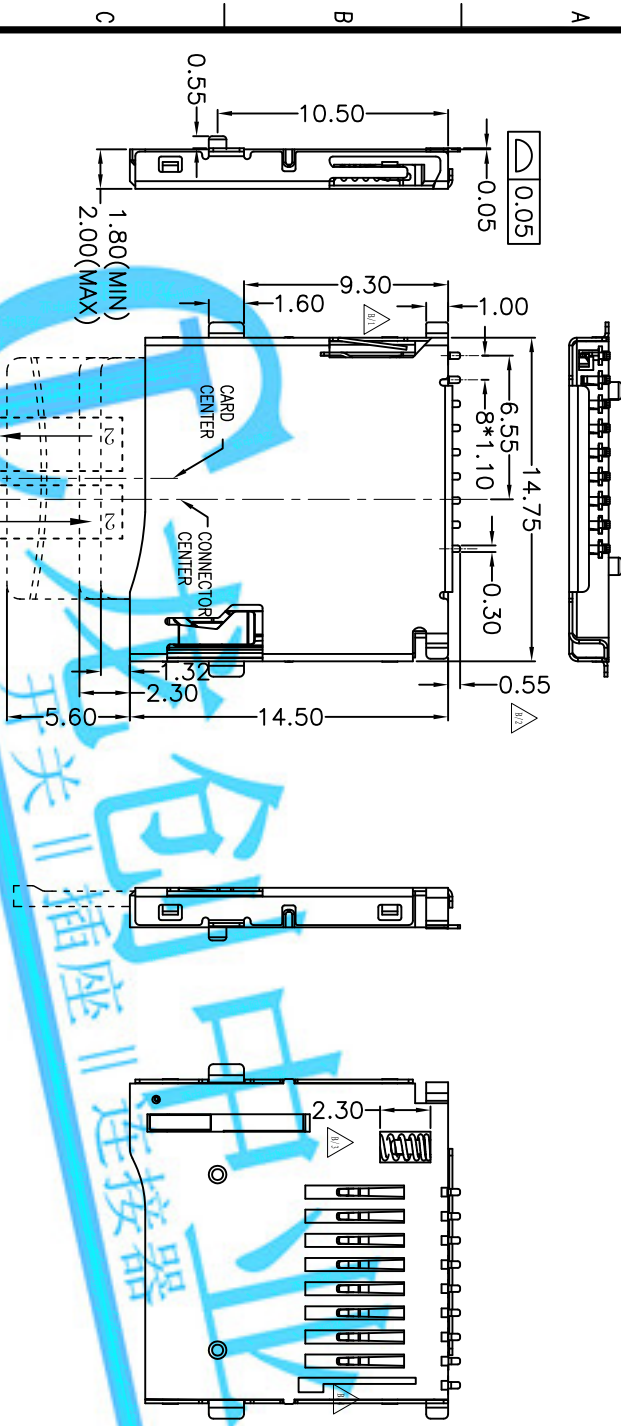


- NOTES:
- 1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC
U94V_0,COLOR:BLACK.
CONTACT: COPPER ALLOYS.
COVER: COPPER ALLOYS OR STEEL.
 - 2.PLATING:
UNDERPLATE: NICKEL.
CONTACT AREA: GOLD OVER NICKEL.
SOLDER AREA: TIN OVER NICKEL.
 - 3.MULTIMEDIA CARD COMPATIBLE

订购须知: TFW1X-XXXX-X000-A




PIN NO.	NAME	TYPE	DESCRIPTION
1	DATE2	I/O/PP	DATE LINE(BIT2)
2	CD/DATE3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATE0	I/O/PP	DATE LINE(BIT0)
8	DATE1	I/O/PP	DATE LINE(BIT1)

REV.	DESCRIPTION	APPD	DATE

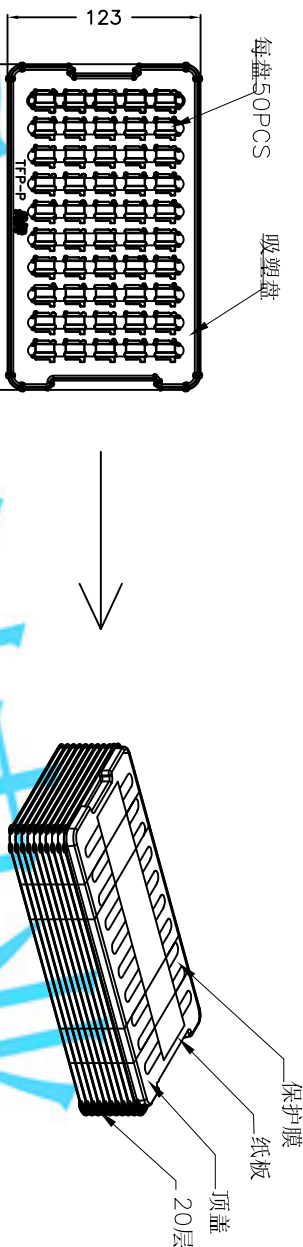


吸塑盘规格: 213*123*8mm
料厚0.35

NO. 1

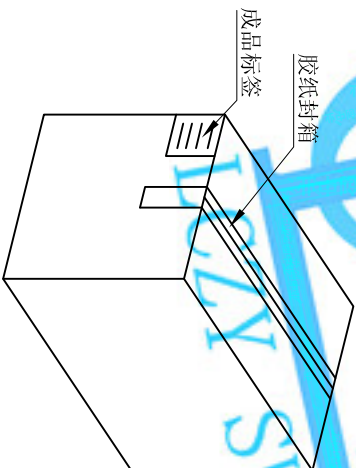

纸箱规格: 26*22.5*19cm


NO. 3

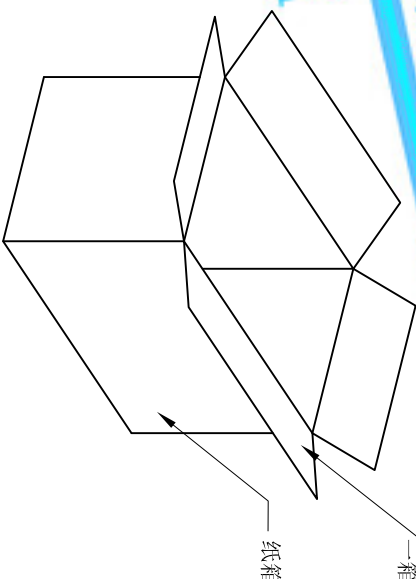

每4000PCS




订购须知: TFW1X-XXXX-X000-A

1. 材质要求:
- 1.1 纸箱的材质为A=A; 外形尺寸为26*22.5*19cm;
 - 1.2 PS盘的材质为PS, PS盘的外形尺寸213*123*8mm;
2. 包装要求:
- 2.1 每一盘装50PCS;
 - 2.2 每20盘累叠在一起, 共计1Kset, 上面需放一个空盘, 加一块纸板, 后用PE膜缠绕;
 - 2.3 把累叠好的PS盘叠放入纸箱中共计4Kset;
 - 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签;





PART NO: TFW1X-XXXX-X000-A		MATERIAL:	
LOT NO:		FINSH:	
UNIT: MM	SIZE: A4	COLOR:	
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°	
DR: PENTUM 0826'09		TITLE: T-FLASH 外焊 PUSH	
CHK: FP-0900012		DWG NO:	
APP:		SCALE: 1:1	
		SHEET: 2 OF 3	
		REV: B/3	

NO. 4

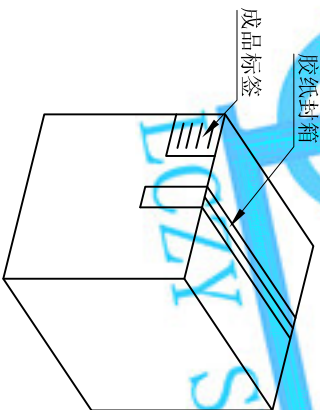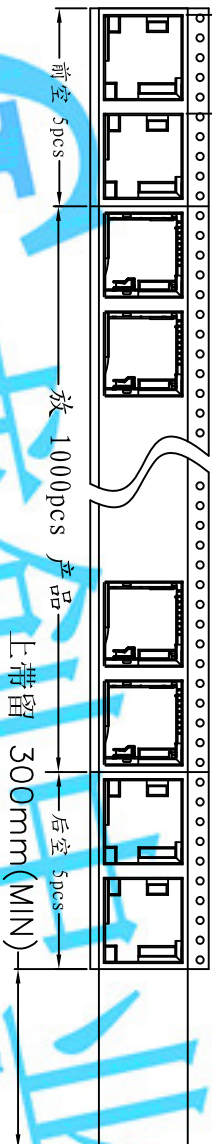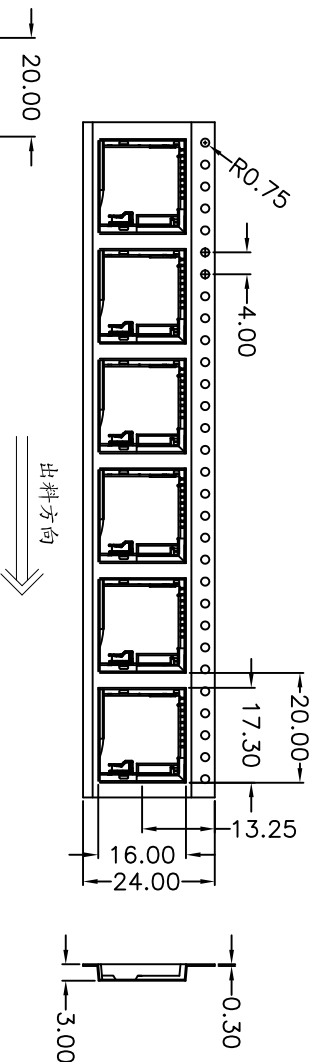


纸箱规格: 340*340*385

NO. 4

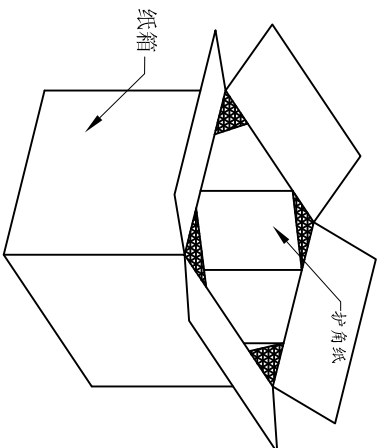


NO. 3

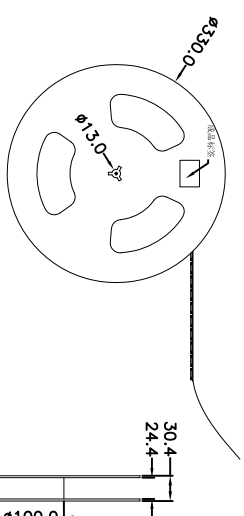

NO. 2

1. 材质要求:
- 1.1 纸箱的材质为K=K; 外形尺寸为34*34*38.5;
 - 1.2 卷盘的材质为PS, 卷盘的外形尺寸为 $\phi 330 \times 30.4$;
 - 1.3 卷带的材质为PS, 卷带的外形尺寸为2020*24.0*3.0mm;
2. 包装方式:
- 2.1 将卷带放入包装机后, 前空5PCS, 后放产品1000PCS, 再后空5PCS; 上带留300MM长度。
 - 2.2 将包装好的产品从包装机上取下并包装好, 贴上内盘标签;
 - 2.3 把累叠好的12盘叠放入纸箱中共计12Kset, 上下放纸板, 纸箱四个角塞护角纸;
 - 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签

订购须知: TFW1X-XXXX-X000-A



PART NO: TFW1X-XXXX-X000-A		MATERIAL:	
LOT NO:		FINSH:	
UNIT: MM	SIZE: A4	COLOR:	
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°	
DR: PENTUM 0826'09		TITLE: T-FLASH 外焊 PUSH	
CHK: FP-090012		REV: B/3	
APP:		SCALE: 1:1 SHEET: 3 OF 3	