

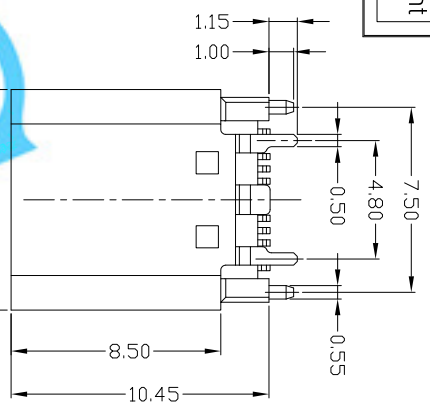

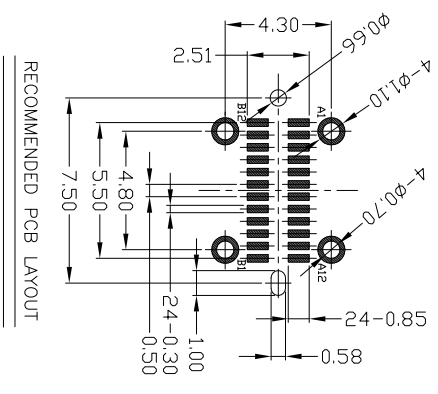
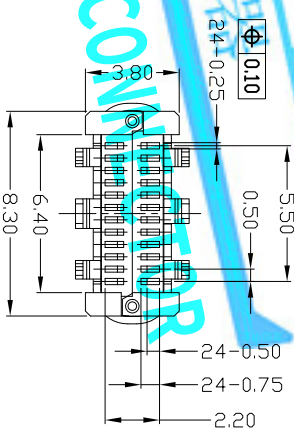


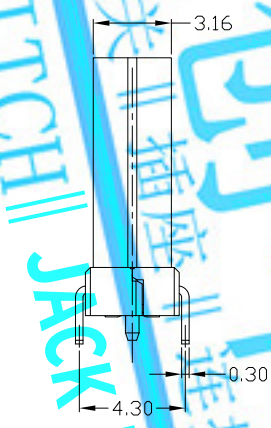

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS					
A1	GND	B12	GND		
A2	SSTXP1	B11	SSRXp1		
A3	SSTXN1	B10	SSRXN1		
A4	VBUS	B9	VBUS		
A5	CC1	B8	SRU2		
A6	DP1	B7	DN2		
A7	DN1	B6	DP2		
A8	SRU1	B5	CC2		
A9	VBUS	B4	VBUS		
A10	SSRXN2	B3	SSTXN2		
A11	SSRXp2	B2	SSTXP2		
A12	GND	B1	GND		
PIN	SIGNAL NAME	PIN	SIGNAL NAME		

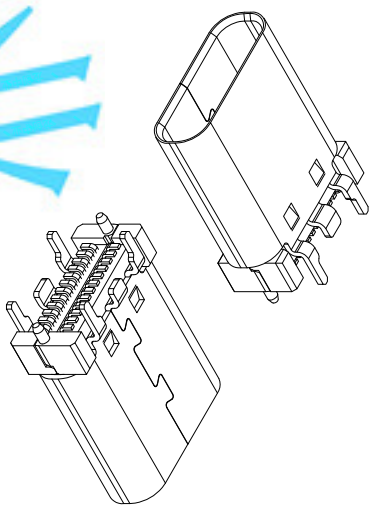

Bill of materials:

5	SPRING	STAINLESS STEEL	1		X: ±0.35	X': ±2°	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
4	SHIELDING PLATE	STAINLESS STEEL	1		X: ±0.3	X': ±1°	MAT'L					
3	SHELL	STAINLESS STEEL	1		.XX ±0.25	.XX°	SEE NDTE					
2	TERMINAL	COPPER ALLOY	24		XXX ±0.15	.XXX°	FINISH					
1	HOUSING	LCP+30%GF	1				SEE NOTE		TITLE:	USB TYPE CF 直立式SWT 长10.5mm	PART NO.:	USCF-24*N-4BQ60
ND	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTCH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTCH INC.				DR:	yon 2018/8/18	DWG NO.:	
									CHKD:	yon 2018/8/18	SCALE	SHEET
									APPD:		1:1	REV. B
												CUSTOMER DRAWING

- NOTES:
- ELECTRICAL:
 - CURRENT RATING:3A MIN FOR VBUS; VOLTAGE: 5VAC MAX 0.25A MIN FOR OTHER.
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-30°C ~ +80°C.
 - Mechanical:
 - INSERTION FORCE: 5~20N.
 - EXTRACTION FORCE: 8~20N.
 - DIMENSIONS MARKED "V" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

