
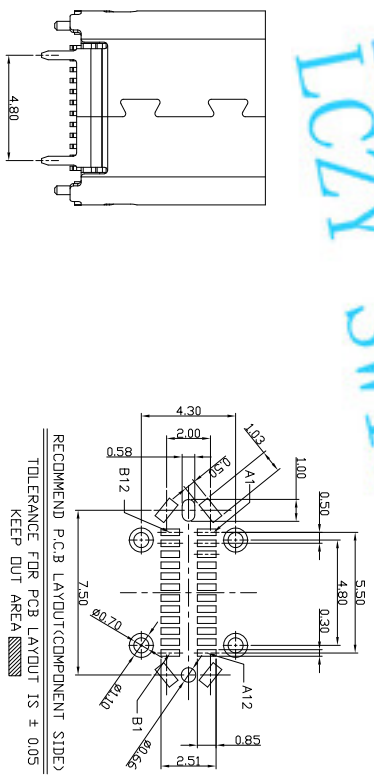
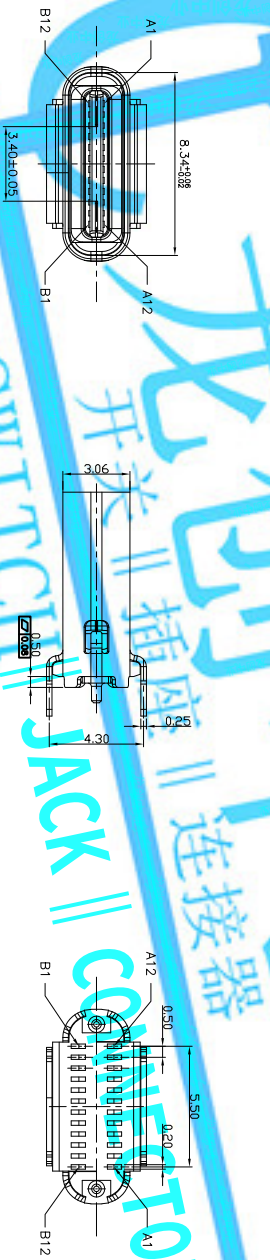


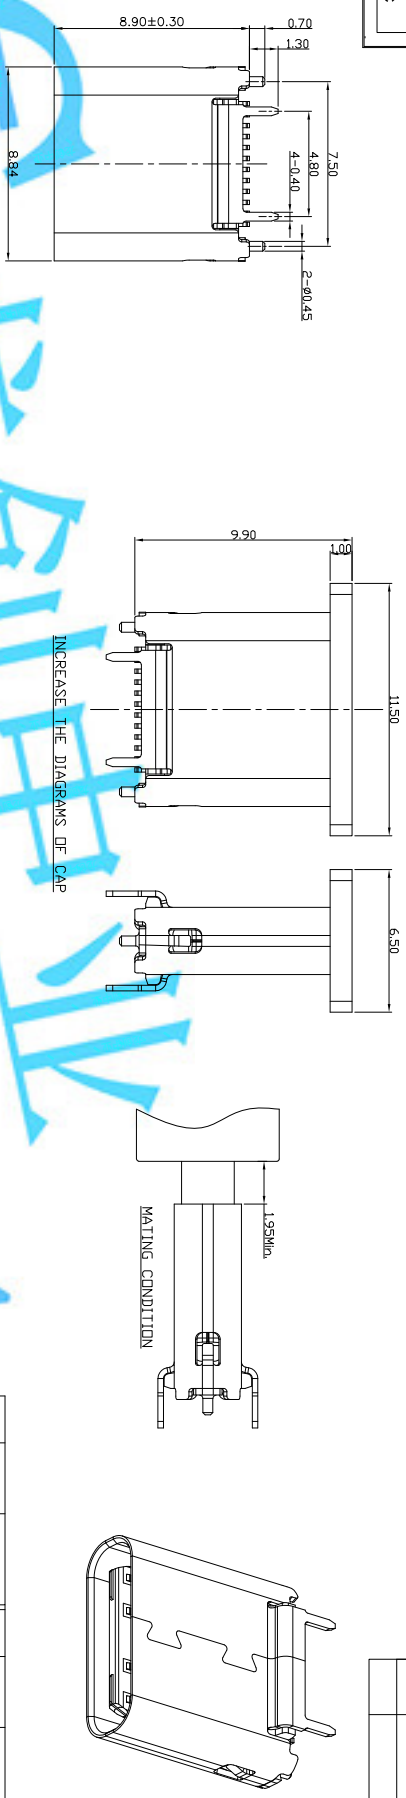

Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	VBUS	First	B9	VBUS	First
A5	CC1	Second	B8	SBUS2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBUS1	Second	B5	CC2	Second
A9	VBUS	First	B4	VBUS	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL	GND		SHELL	GND	

NOTES:
1)ELECTRICAL CHARACTERISTICS:
1)CURRENT RATING: 5A FOR VBUS PIN, 1.25A FOR VCONN PIN.
2)INSULATION RESISTANCE: 100MΩ Min.
3)CONTACT RESISTANCE: 40mΩ Max FOR INITIAL.
10mΩ CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.
4)WITHSTANDING VOLTAGE: 100V AC R.M.S.
5)OPERATING TEMPERATURE: -40℃ ~ 85℃
2)MECHANICAL CHARACTERISTICS:
1)MATING FORCE: 5N~20N
2)UNMATED FORCE: 6N~20N AFTER TEST
3)DURABILITY: 10,000 CYCLES
3)DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO. USCf-24*N-4B0L02

14u 10~
24u 30~
54u 15u~
64u 30~

V:WHITE
B:BLACK
1PBT
2PA6T
3PA6T
4LCP

5				X: ±0.50	ANGEL ±2°	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
4				X: ±0.30		MAT'L					
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL		SEE NOTE					
2	CONTACT	COPPER ALLOY	24	PLATED GOLD/TIN		FINISH					
1	INSULATOR	LCP+30%GF	1	UL94V-0		Q'TY		DR: 2018/02/14	DWG NO.: USCf-24* N-4B0L02	SCALE: 1:1	SHEET: 1/1
NO	PARTS	MATERIAL	QTY	FINISHING		APPD: 2018/02/14		CHKD: 2018/02/14	REV: A11-Q1.02	REV: B	CUSTOMER DRAWING
1	2	3	4	5	6	7					