

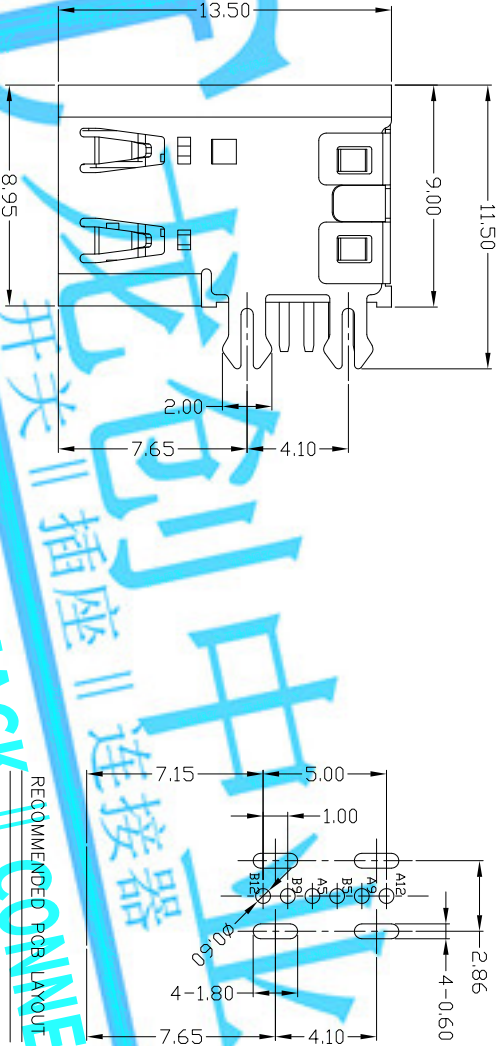


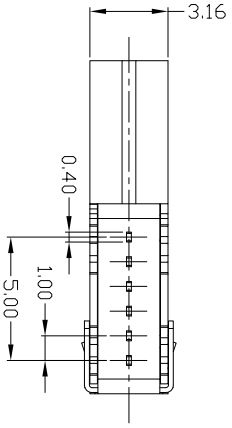


USB TYPE-C 6P
RECEPTACLE INTERFACE PIN ASSIGNMENTS

A5	CC1	B5	CC2
A9	VBUS	B9	VBUS
A12	GND	B12	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

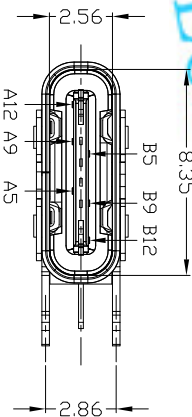

- NOTES:
- ELECTRICAL:
 - CURRENT RATING:3A MIN FOR VBUS;
VOLTAGE: 5VAC MAX 0.25A MIN FOR OTHER.
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-30℃ ~ +80℃.
 - Mechanical:
 - INSERTION FORCE: 5~20N.
 - EXTRACTION FORCE: 8~20N.
 - DIMENSIONS MARKED "▲" TD BE CHECKED BY Q.C & IPQC.
 - PART NO.



Bill of materials:				LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
5	SPRING	STAINLESS STEEL	1	X: ±0.35	X: ±2°	UNITS	
4	COVER	STAINLESS STEEL	1	X: ±0.3	X: ±1°	MAT'L	
3	SHELL	STAINLESS STEEL	1	.XX ±0.25	.XX°	SEE NOTE	
2	TERMINAL	COPPER ALLOY	6	XXX ±0.15	.XXX°	FINISH	
1	HOUSING	LCP+30%GF	1	UL 94V-0		Q'TY	
ND	PARTS	MATERIAL	QTY	FINISHING		APPD:	

1 2 3 4 5 6 7

REV.	ECN.	NO.	APPD.

TITLE: USB TYPE-C 6P 侧插式13.5 D1P 6P
四支垂直脚
DR: gsm 2018/8/18
CHKD: gsm 2018/8/18
APPD: gsm 2018/8/18

PART NO.: USCf-061N-4BCG43

DWG NO.: A11-CG43

SCALE SHEET REV. 1:1 B

CUSTOMER DRAWING