
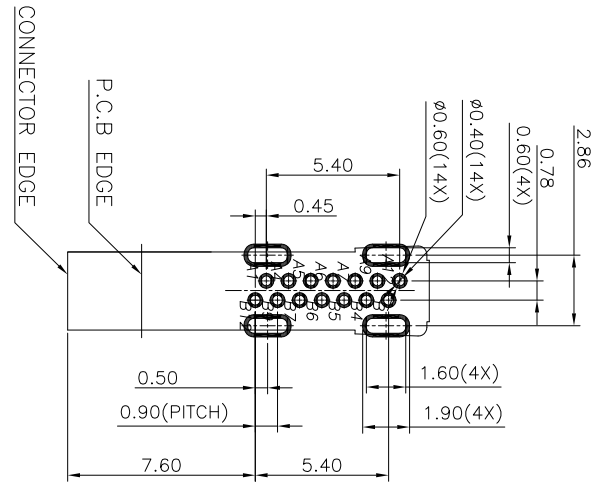
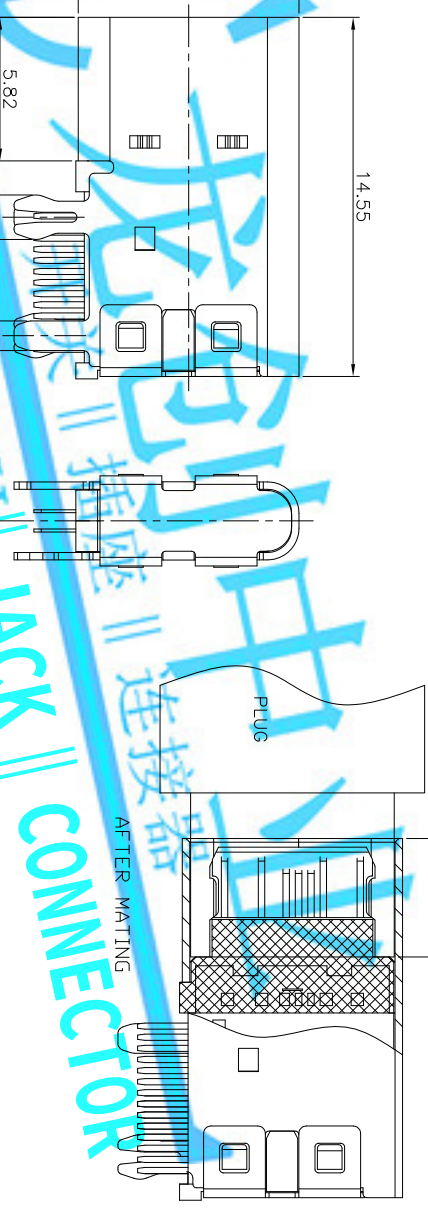
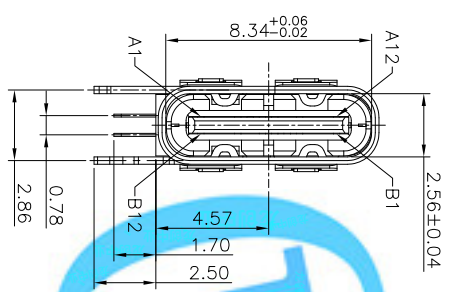


PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	Dn2
A6	Dp1	B6	Dp2
A7	Dn1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

USB TYPE-C PIN ASSIGNMENTS

NOTES:
1.ELECTRICAL:
1)CURRENT RATING: 5AMP 5.0VDC
2)INSULATION RESISTANCE: 100MΩ MIN;
3)CONTACT RESISTANCE: 40mΩ MAX;
4)WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE.
5)OPERATING TEMPERATURE:-25°C TO +85°C.
2.Mechanical:
1)Insertion Force: 5N~20N
2)Removal Force: 8N~20N
3)Durability: 10,000 cycles
3.DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.



5	EMI PLATE	STAINLESS STEEL	1	X: ±0.35	X: ±2°	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
4	FRONT SHELL	STAINLESS STEEL	1	X: ±0.30	X: ±1°	MAT'L					
3	MID PLATE	STAINLESS STEEL	1	.XX ±0.20	.XX' ±0.5°	SEE NOTE					
2	CONTACT	COPPER ALLOY	14	XXX ±0.10	.XXX°	FINISH					
1	HOUSING	LCP+30%GF	1	UL94V-0		Q'TY		DR: Study 2018/08/27	DWG NO.:	USCF-14XN-4BCSS20	SCALE SHEET REV. AII-CS20
NO	PARTS	MATERIAL	QTY	FINISHING		APPD:		CHKD: Study 2018/08/27	1:1	1/1	B CUSTOMER DRAWING