


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	DN2
A6	DP1	B6	DP2
A7	DN1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

PCB板厚建议1.0~1.2MM

PCB EDGE

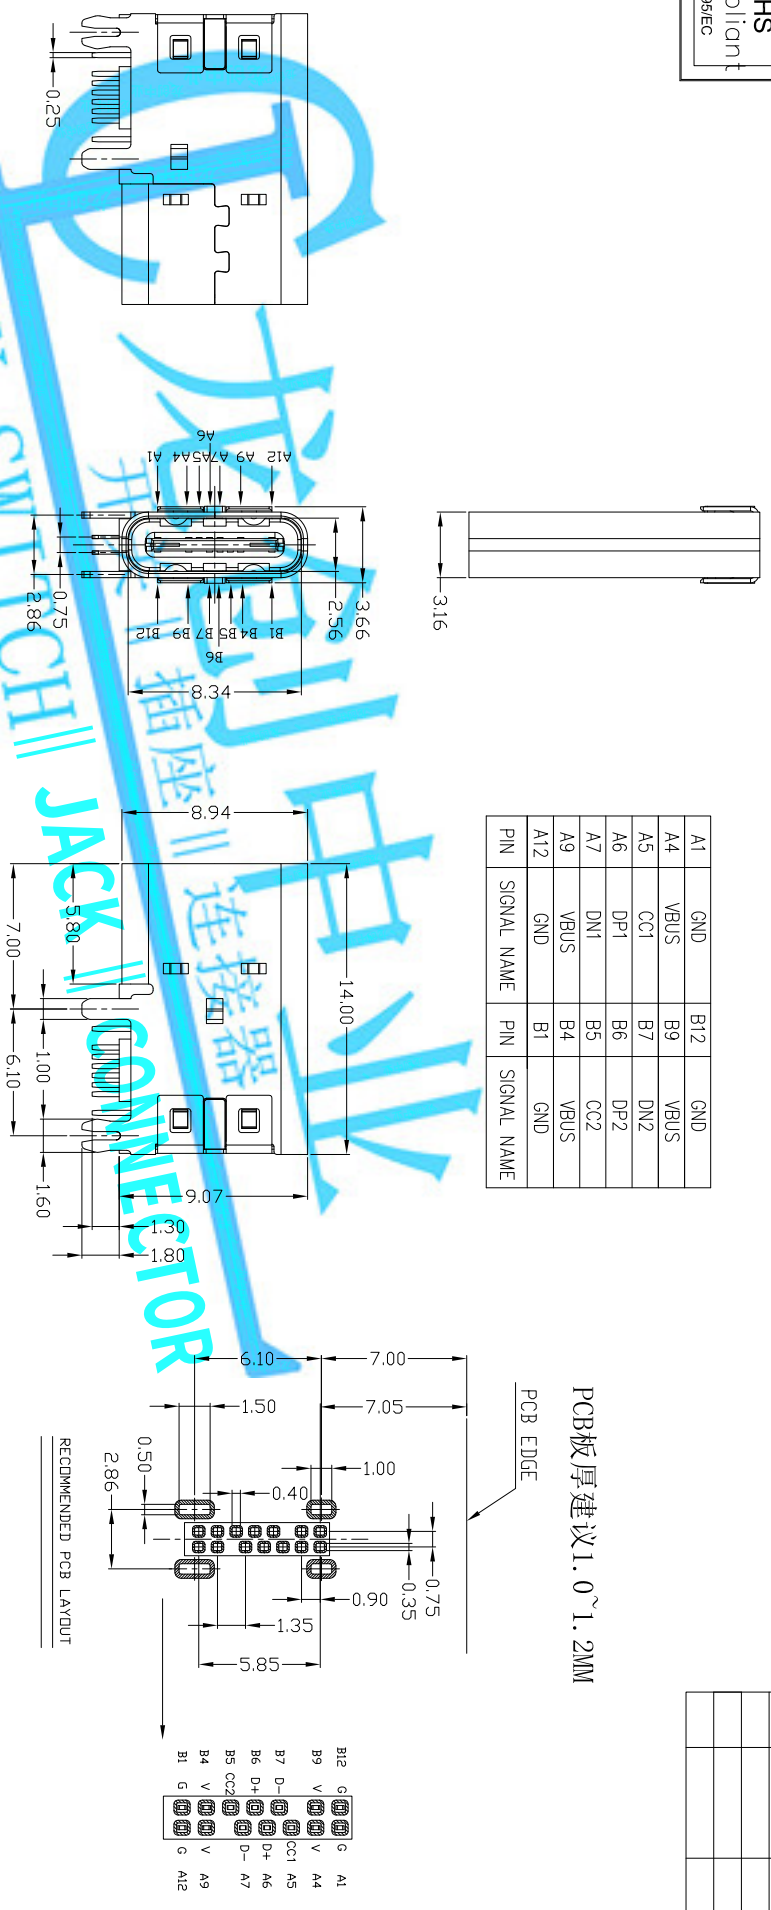

Bill of materials:

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE: USB TYPE CF 侧插式14.0 DTP 14P 前小脚后鱼叉脚					PART NO.: USCF-141N-4BCZ21				
DR: <i>gym</i> 2018/10/25					DWG NO.: A11-CZ21				
CHKD: <i>gym</i> 2018/10/25					SCALE (SHEET REV. B)				
APPD:					CUSTOMER DRAWING				
									
5	COVER	STAINLESS STEEL	1	PLATED NICKEL	X: ±0.35	X: ±2°	UNITS	mm	
4	CENTER PIECE SHIELDIND PLATE	STAINLESS STEEL	1		X: ±0.3	X: ±1°	MAT'L		
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.25	.XX°	SEE NOTE		
2	TERMINAL	COPPER ALLOY	14	PLATED GOLD/TIN	.XXX ±0.15	.XXX°	FINISH		
1	HOUUSING	LCP+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTCH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTCH INC.				
ND	PARTS	MATERIAL	QTY	FINISHING					

- NOTES:
- ELECTRICAL:
 - CURRENT RATING:5AMP MIN FOR VBUS; VOLTAGE RATING: 20VAC MAX 0.25A MIN FOR OTHER.
 - INSULATION RESISTANCE: 100MΩMIN;
 - CONTACT RESISTANCE: 40mΩMAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - INSERTION Force: 5~20N.
 - EXTRACTION Force: 8~20N.
 - DIMENSIONS MARKED ▼ TO BE CHECKED BY Q/C & IPQC.

