


PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	DN2
A6	DP1	B6	DP2
A7	DN1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND


PCB板厚建议1.0~1.2MM

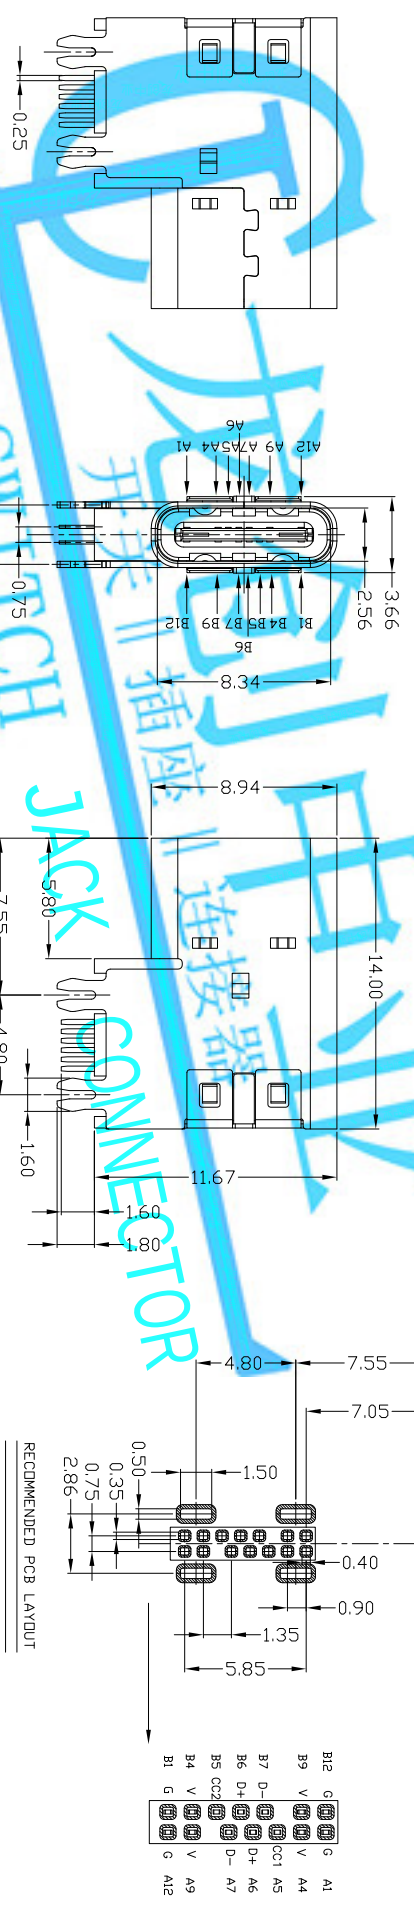

Bill of materials:

5	COVER	STAINLESS STEEL	1	PLATED NICKEL	X: ±0.35	X: ±2°	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
4	CENTER PIECE SHIELDING PLATE	STAINLESS STEEL	1		X: ±0.3	X: ±1°	MAT'L		TITLE: USB TYPE CF 侧插式14.0 DTP 14P 结构图, 6 四支鱼叉脚				
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.25	.XX°	SEE NOTE		PART NO.: USCF-141N-4BCZ22				
2	TERMINAL	COPPER ALLOY	14	PLATED GOLD/TIN	.XXX ±0.15	.XXX°	FINISH		DR: gsm 2018/10/25				
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY		CHKD: gsm 2018/10/25				
ND	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.				APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
									1:1	1/1	B		

- NOTES:
- ELECTRICAL:
 - CURRENT RATING: 5AMP MIN FOR VBUS;
 - VOLTAGE RATING: 20VAC MAX
 - 0.25A MIN FOR OTHER.
 - INSULATION RESISTANCE: 100MΩMIN;
 - CONTACT RESISTANCE: 40mΩMAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - INSERTION Force: 5~20N.
 - EXTRACTION Force: 8~20N.
 - DIMENSIONS MARKED ▼ TO BE CHECKED BY Q.C & IPQC.



4. PART NO.