
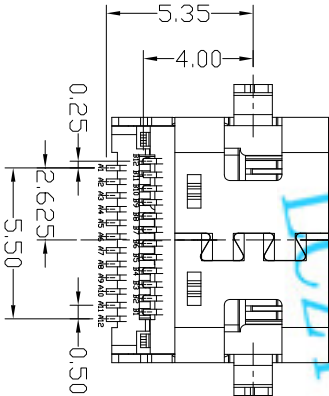


CONNECTOR
FRONT EDGE

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

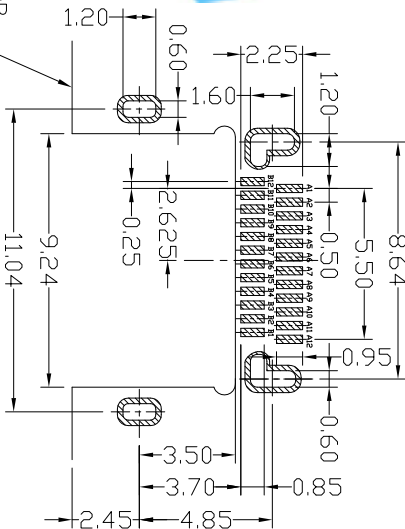

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- NOTES:
- ELECTRICAL:
 - CURRENT RATING: 3AMP MAX;
 - INSULATION RESISTANCE: 100MΩ MIN 250V DC;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 250V AC;
 - OPERATING TEMPERATURE:-30°C TD +85°C.
 - Mechanical:
 - Mating Force: 5N~20N
 - Unmating Force: 8N~20N
 - DIMENSIONS MARKED "▲" TD BE CHECKED BY Q.C & IPQC

4.PART NO.

USCF-24*IN-4BY602

V:WHITE
B:BLACK
1PBT
2PA6T
3PA9T
4LCP
1Au 1U"
2Au 3U"
5Au 15U"
6Au 30U"

5	SHRAPNEL	STAINLESS STEEL	1		.X ±0.30	.X' ±1"	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
4	HODK	STAINLESS STEEL	1	PLATED TIN	.XX ±0.20	.XX'	MAT'L	SEE NOTE				
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XXX ±0.10	.XXX'	FINISH	SEE NOTE				
2	TERMINAL	COPPER ALLOY	24	PLATED GOLD			DR:	2017/12/11				
1	HOUSING	LCP+30%GF	1	UL94V-0			CHKD:	2017/12/11	PART NO.: USCF-24XN-4BV602			
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY	SCALE	SHEET	REV.	CUSTOMER DRAWING
								APPD:	1:1	1/1	B	