

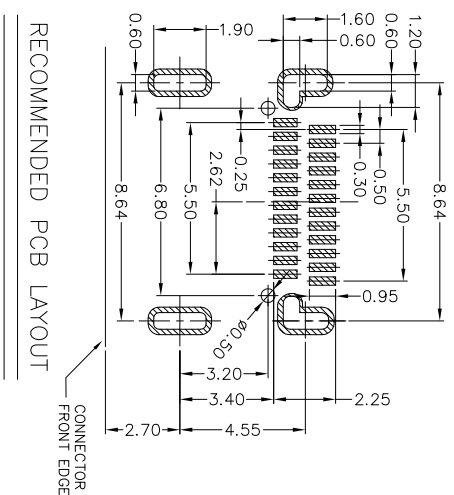



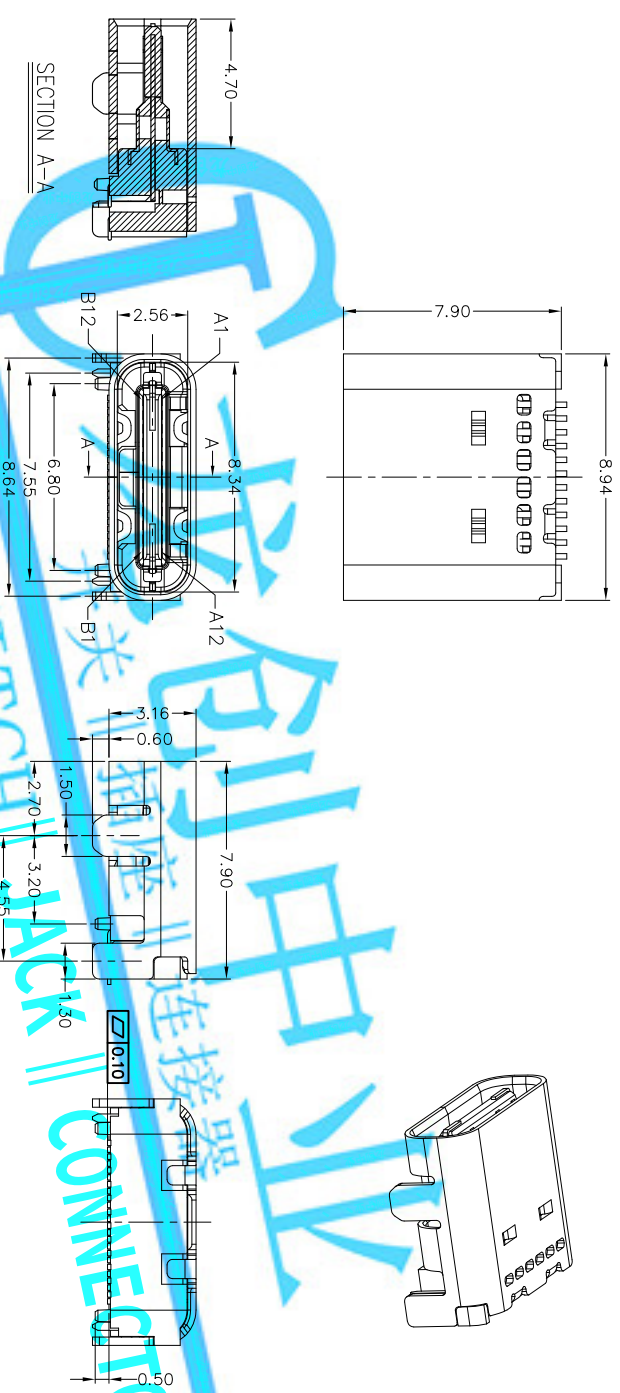

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

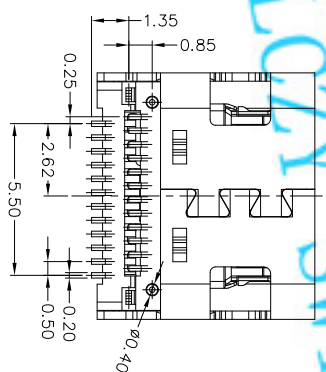

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	SCALE	SHEET	REV.	CUSTOMER
5	SHRAPNEL	STAINLESS STEEL	1		X. ±0.35	X. ±2°	MAT'L	LONGCHUANG ZHONGYE (HK)CO.,LIMITED	1:1	1/1	B	CUSTOMER
4	HOOK	STAINLESS STEEL	1	PLATED TIN	X. ±0.3	X. ±1°	SEE NOTE	USCF-24*N-4BV64	1:1	1/1	B	CUSTOMER
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.25	.XX°	FINISH	USCF-24*N-4BV64	1:1	1/1	B	CUSTOMER
2	TERMINAL	COPPER ALLOY	24	PLATED GOLD	.XXX ±0.15	.XXX°	SEE NOTE	USCF-24*N-4BV64	1:1	1/1	B	CUSTOMER
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY	USCF-24*N-4BV64	1:1	1/1	B	CUSTOMER
							APPD:	USCF-24*N-4BV64	1:1	1/1	B	CUSTOMER

- NOTES:
- ELECTRICAL:
 - CURRENT RATING: 3AMP MAX:
 - INSULATION RESISTANCE: 100MΩ MIN 250V DC:
 - CONTACT RESISTANCE: 30mΩ MAX:
 - WITHSTANDING VOLTAGE: 250V AC:
 - OPERATING TEMPERATURE: -30°C TO +85°C.
- Mechanical:
- Mating Force: 5N~20N
 - Umating Force: 8N~20N
 - DIMENSIONS MARKED " " TO BE CHECKED BY Q.C & IPQC.

