
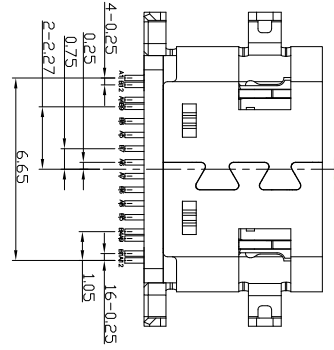


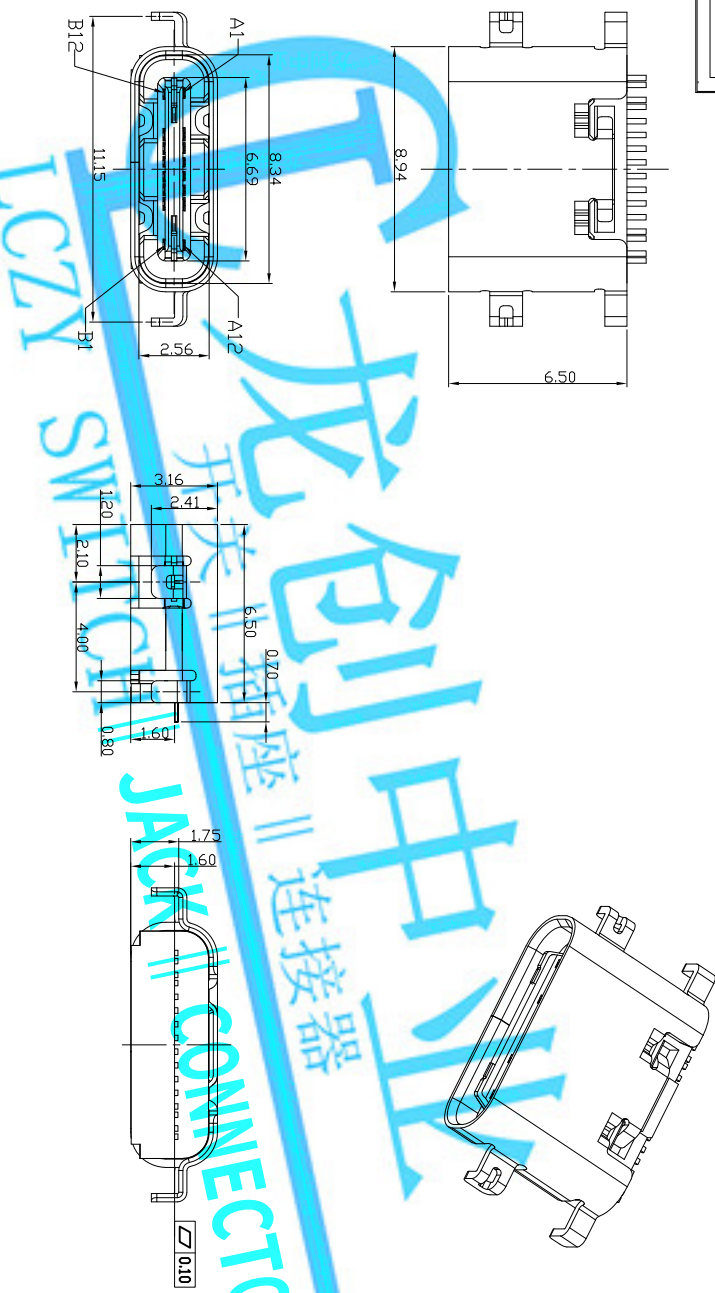

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBUS	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- NOTES:
- ELECTRICAL:
 - CURRENT RATING: 3AMP MAX;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-30°C TD +85°C.
 - Mechanical:
 - Mating Force: 5N~20N
 - Unmating Force: 8N~20N
 - Durability: 10,000 cycles
 - DIMENSIONS MARKED "▼" TD BE CHECKED BY Q/C & IPQC.

4.PART NO.

USCF-16*1N-4BV5203

1Au 1u"
2Au 3u"
5Au 15u"
6Au 30u"

1uPBT
2uPA6T
3uPA9T
4uLCP

W/WHITE
B/BLACK

RECOMMENDED P.C.B. LAYOUT

TOLERANCE UNSPECIFIED ±0.05mm

5	SHELL	STAINLESS STEEL	1	PLATED NICKEL	X: ±0.35	X: ±2°	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
4	SHIELDING PLATE	STAINLESS STEEL	1		X: ±0.30	X: ±1°	MAT'L		TITLE:			
3	MD	LCP+30%GF	1	UL94V-0	.XX ±0.20	.XX' ±0.5°	SEE NDTE		USB C F TYPE #HSHMT 16PIN L=6.5718±0.16 CONN			
2	CONTACT	COPPER ALLOY	16	PLATED GOLD/NICKEL	.XXX ±0.10	.XXX°	FINISH		DR: 2017/11/16			
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY		CHKD: 2017/11/16			
ND	PARTS	MATERIAL	QTY	FINISHING			APPD:		SCALE SHEET REV. A11-VS203			
			1	2	3	4	5	6	7	1/1	B	CUSTOMER DRAWING