
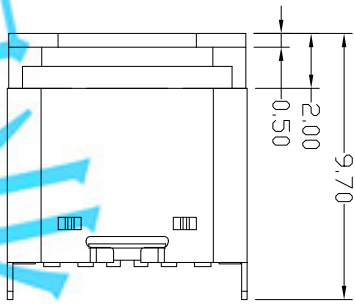




RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

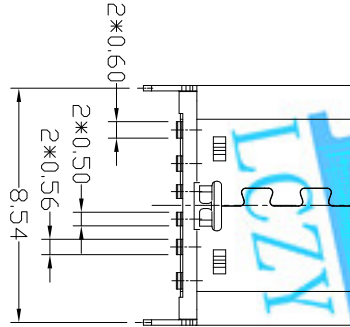

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:
1ELECTRICAL:
1)CURRENT RATING: 3A MAX.
2)INSULATION RESISTANCE: 100MΩ MIN.
3)CONTACT RESISTANCE: 40mΩ MAX.
4)WITHSTANDING VOLTAGE: 100V AC
5)OPERATING TEMPERATURE:-30℃ TO +85℃.
2Mechanical:
1)Mating Force: 5N~20N
2)Umating Force: 8N~20N
3)Durability: 10,000 cycles
3DIMENSIONS MARKED "V"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
USCF-06*IN-4BQS22
1Au 10μ"
2Au 30μ"
5Au 15μ"
6Au 300"
VWHITE
BBLACK
1PBT
2PA6T
3PA9T
4LCP

5	COVER	LCP+30%GF	1	UL94V-0	.X	±0.30	.X'	±2'	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
4	SHIELDING PLATE	STAINLESS STEEL	1		.XX	±0.20	.XX'	±1'	MAT'L					
3	SHELL	STAINLESS STEEL	1		.XXX	±0.10	.XXX'	±0.5'	SEE NOTE					
2	CONTACT	COPPER ALLOY	6						FINISH					
1	HOUSING	LCP+30%GF	1	UL94V-0					SEE NOTE		PART NO.: USCF-06*IN-4BQS22			
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				Q'TY		DWG NO.: A11-QS22			
											SCALE SHEET REV. 1:1 B			
											CUSTOMER DRAWING			