


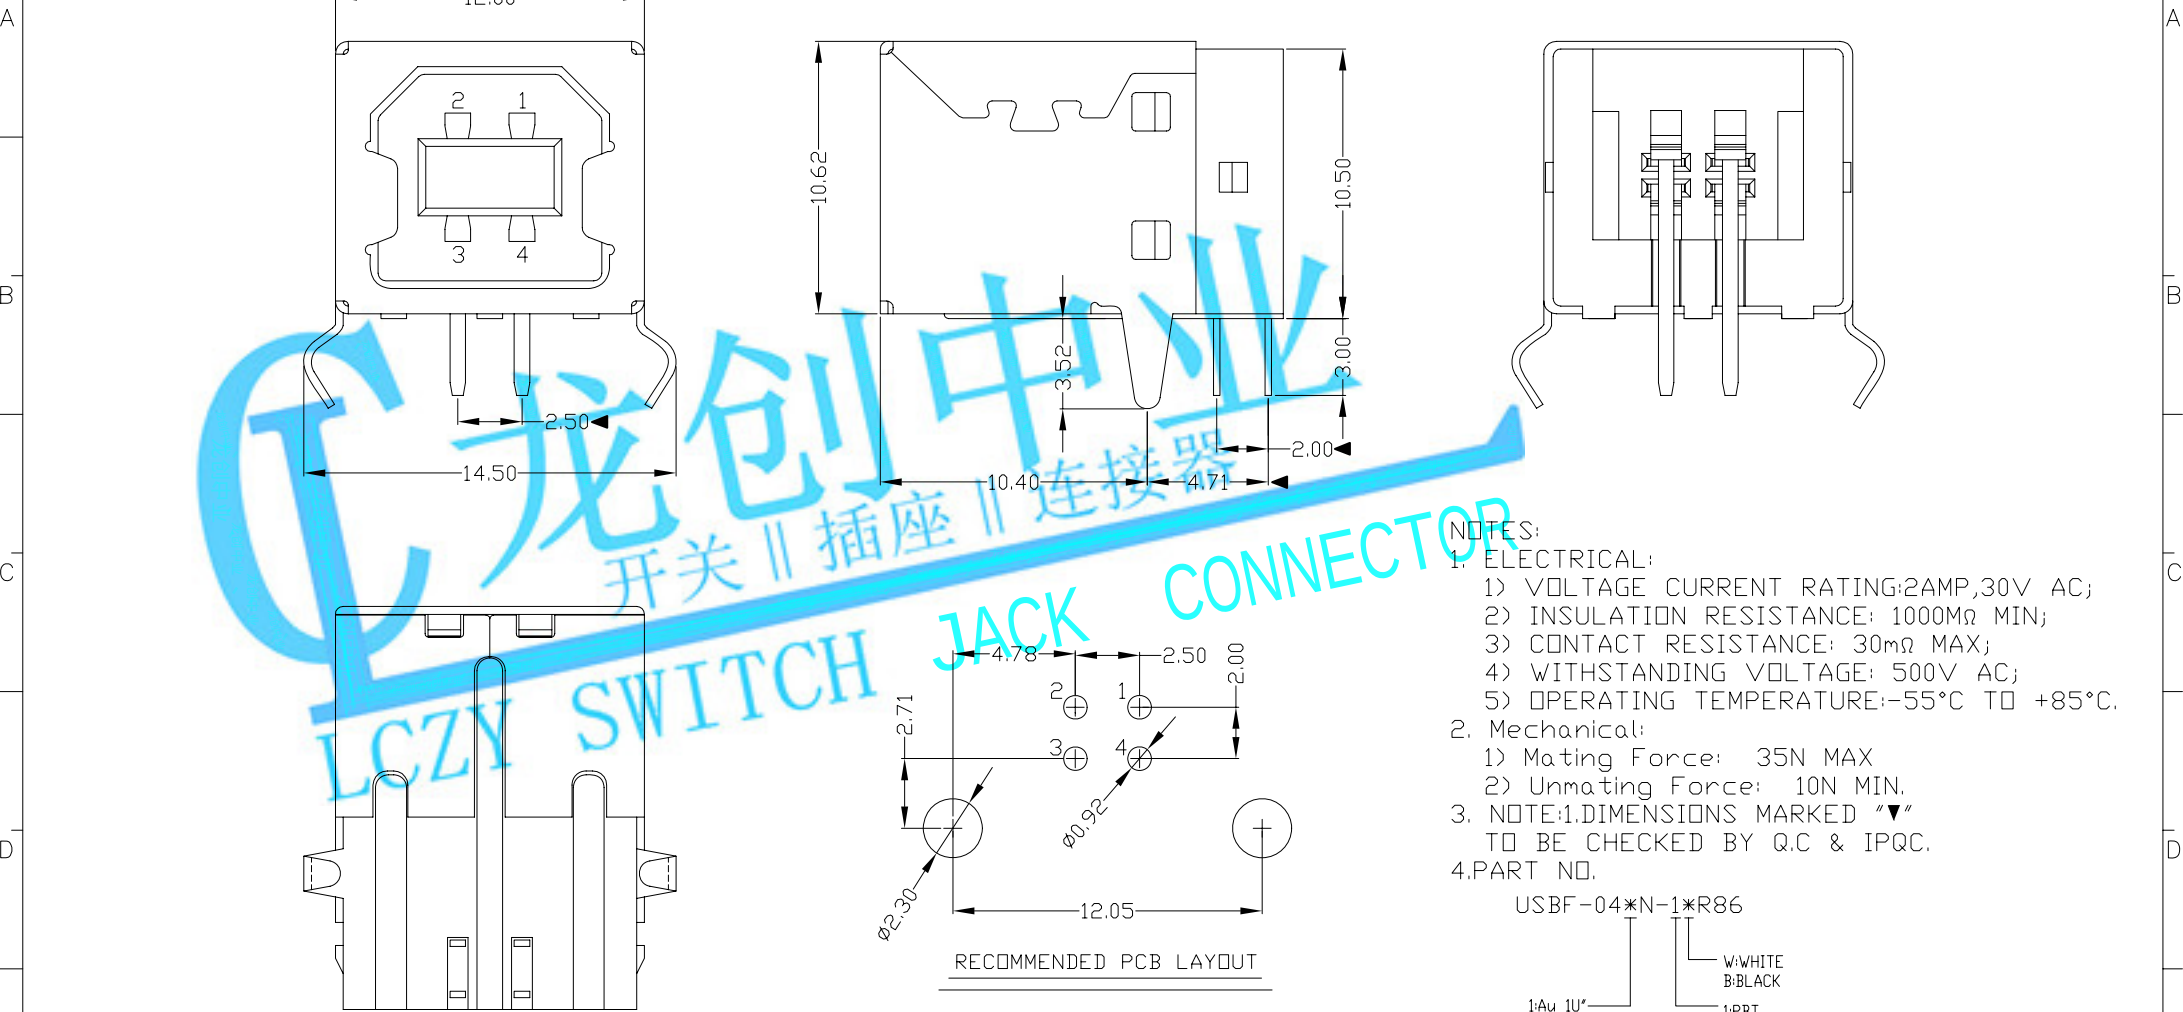

NOTES:

1. ELECTRICAL:

1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;

2) INSULATION RESISTANCE: 1000MΩ MIN;

3) CONTACT RESISTANCE: 30mΩ MAX;

4) WITHSTANDING VOLTAGE: 500V AC;

5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

1) Mating Force: 35N MAX

2) Unmating Force: 10N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USB F-04*N-1*R86

1: Au 1U*
6: Au 30U*

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	3	HOUSING	PBT	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
						.X ±0.30	.X.* ±1*	MAT'L								
	2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	SEE NOTE		TITLE:	USB B/F 90° DIP弯脚(无后盖)		PART NO.:	USBF-04*N-1*R86		
	1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH		DR:	gan 2012/7/04		DWG NO.:	AII-R86		
						THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE		CHKD:	gan 2012/7/04		SCALE	SHEET	REV.	CUSTOMER
								Q'TY		APPD:			1:1	1/1	B	DRAWING
																