

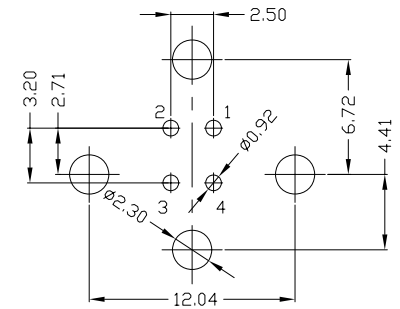



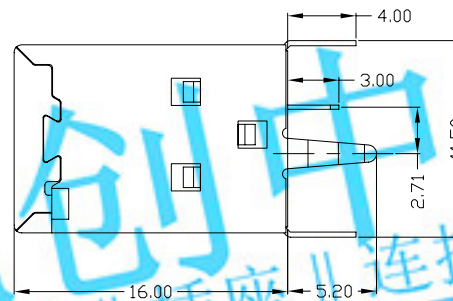


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

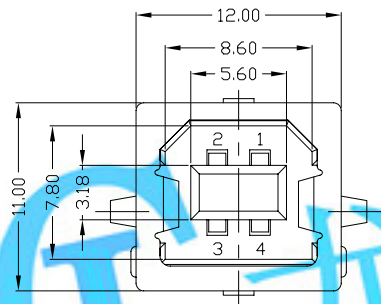

RECOMMENDED PCB LAYOUT

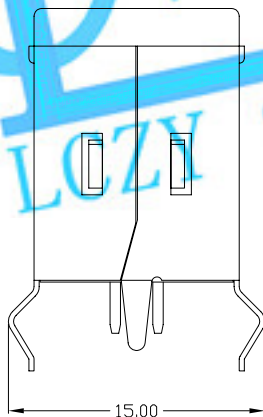

NOTES:

1. ELECTRICAL:


- VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- INSULATION RESISTANCE: 1000MΩMIN;
- CONTACT RESISTANCE: 30mΩMAX;
- WITHSTANDING VOLTAGE: 500V AC;
- OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- Mating Force: 35N MAX
- Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.3	.X* ±1*	mm	TITLE: USB BF 180度 插板式(4脚)			
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XX ±0.25	.XX*	MAT'L				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	SEE NOTE	PART NO.: USBF-04*N-1*P31			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.					FINISH		SEE NOTE	DR: gan 2014/09/16			
					Q'TY		SEE NOTE	CHKD: gan 2014/09/16			
								APPD:			
								SCALE	SHEET	REV.	CUSTOMER DRAWING
								1:1	1/1	B	