

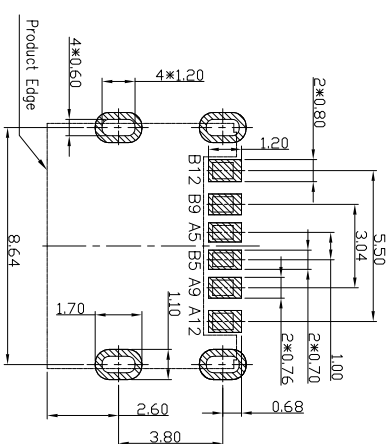
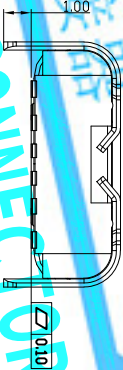







RECOMMENDED PCB LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- NOTES:
- ELECTRICAL:
 - CURRENT RATING: 5AMP MAX;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-30°C TD +85°C.
 - Mechanical:
 - Mating Force: 5N~20N
 - Unmating Force: 8N~20N
 - Durability: 10,000 cycles
 - DIMENSIONS MARKED "▼"
TD BE CHECKED BY Q/C & IPQ

4.PART NO.

USCF-06***N**-4BV**S**207

1Au 10u"
2Au 3u"
5Au 15u"
6Au 30u"
1PBT
2PA6T
3PA9T
4LCP
W/WHITE
B/BLACK

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

5				X: ±0.35	X: ±2'	UNITS	mm	PART NO.:			
4				X: ±0.30	X: ±1'	MAT'L		USCF-06* N -4BV S 207			
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	SEE NDTE	FINISH		DWG NO.:			
2	CONTACT	COPPER ALLOY	6	PLATED GOLD/NICKEL	SEE NDTE	DR:		A11-V S 207			
1	HOUSING	LCP+30%GF	1	UL94V-0	Q'TY	CHKD:		SCALE SHEET REV.:			
NO	PARTS	MATERIAL	QTY	FINISHING	APPD:			CUSTOMER DRAWING			

REV.	ECN.	NO.	APPD.