
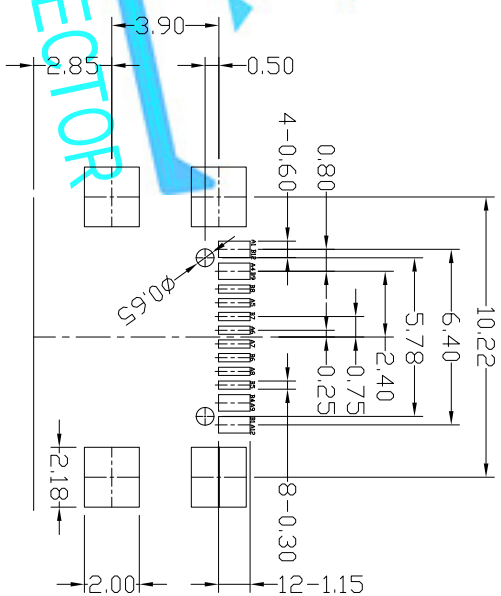
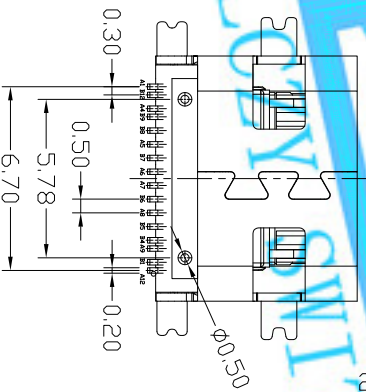
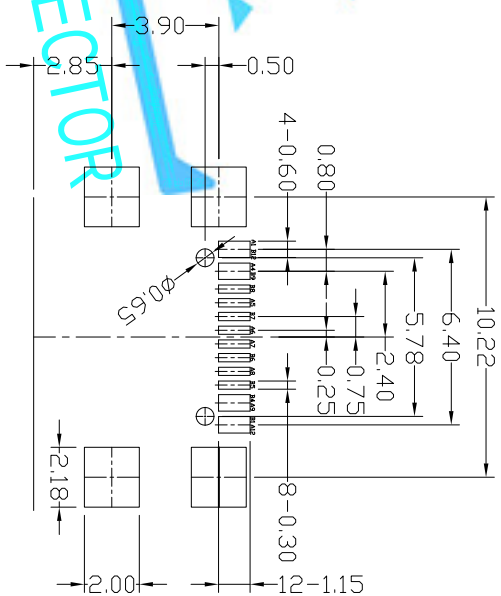
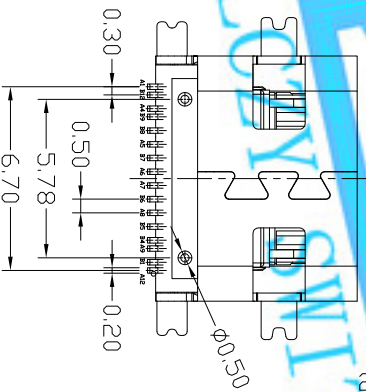
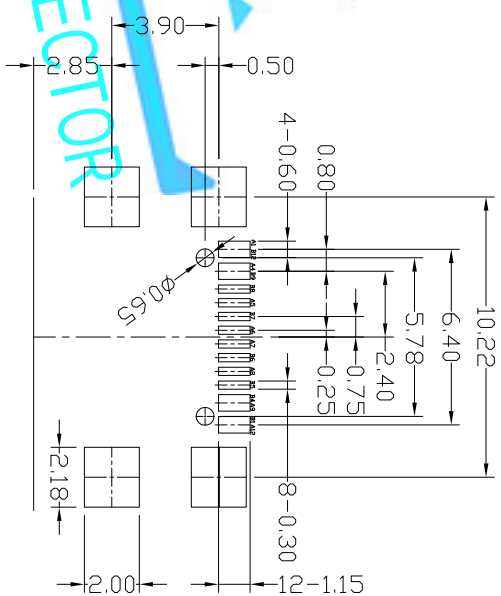
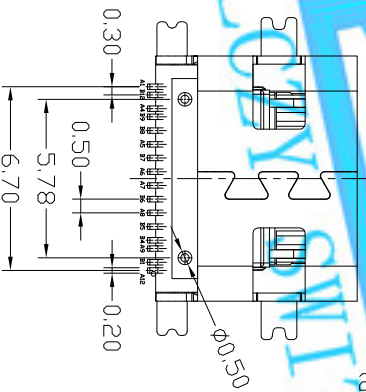
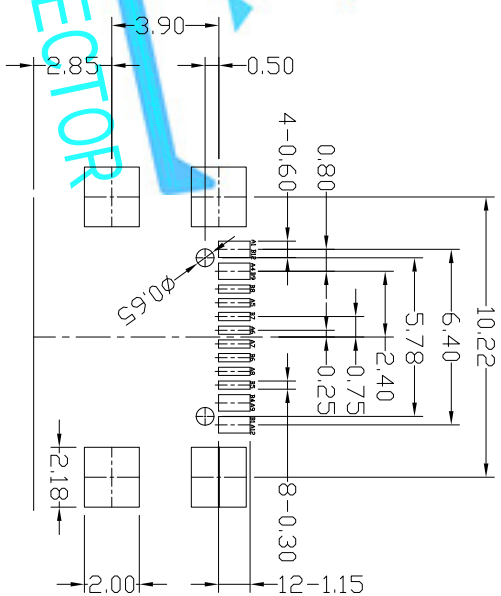
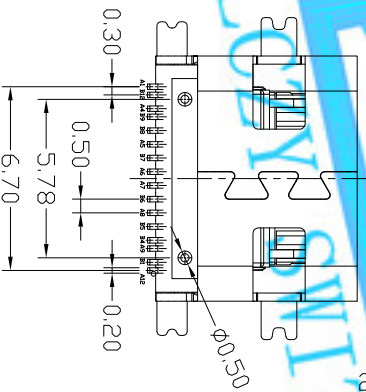
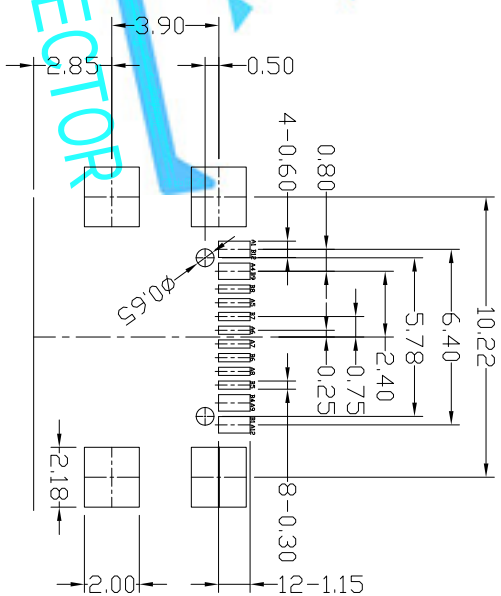
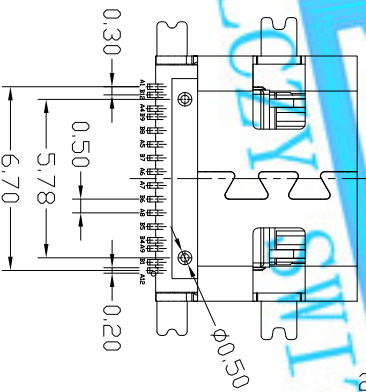
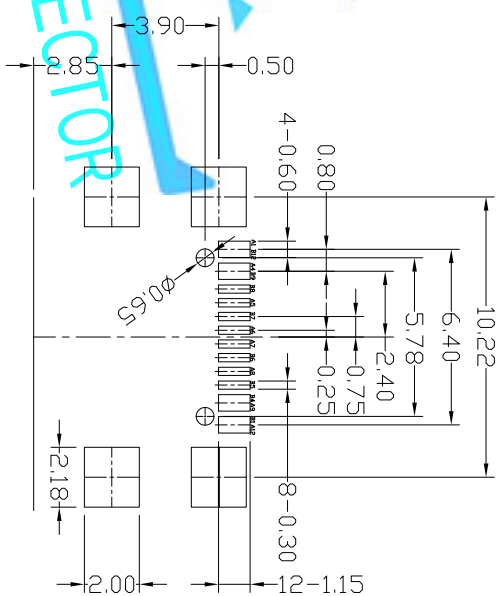
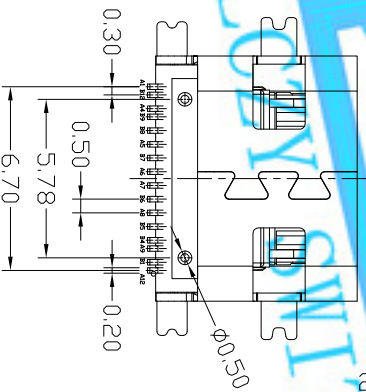
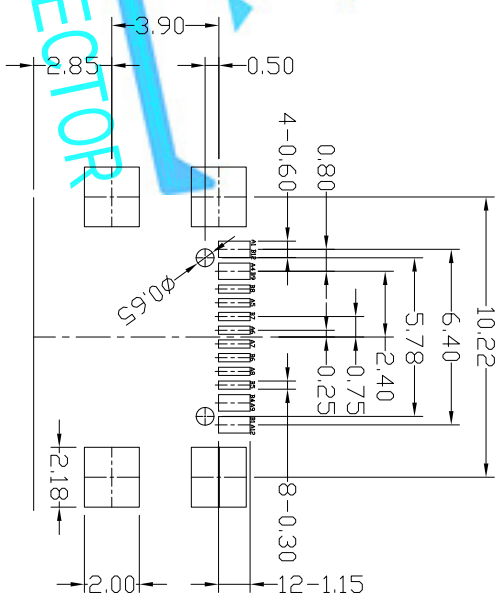
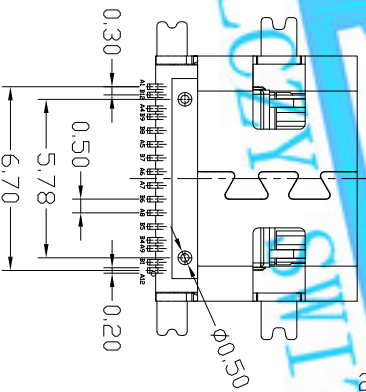
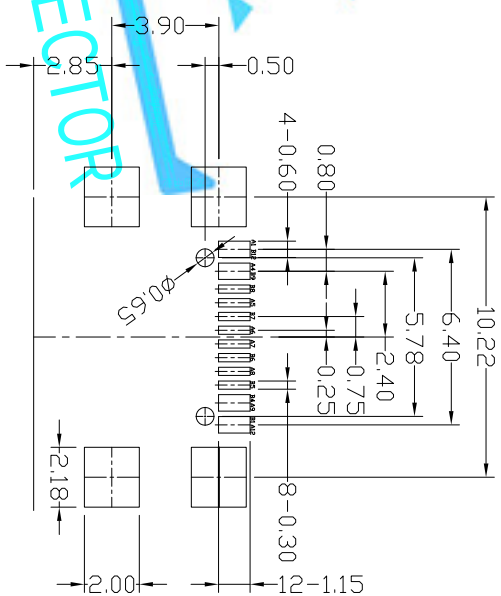
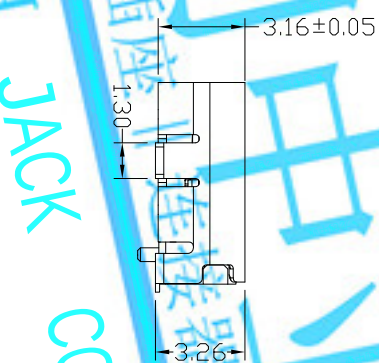
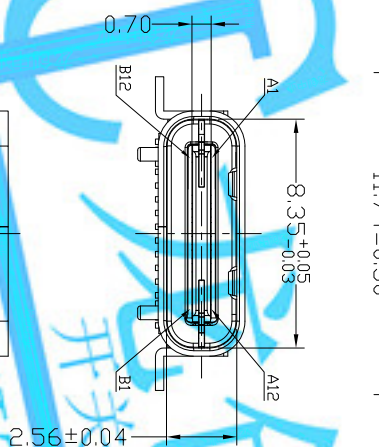


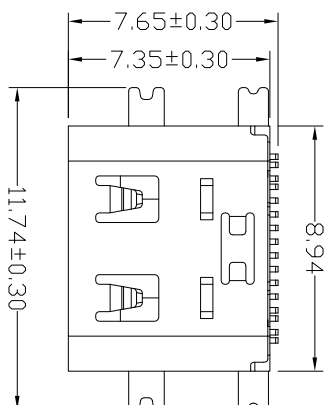

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

- NOTES:
1. ELECTRICAL:
- 1) CURRENT RATING: 3AMP MAX;
 - 2) INSULATION RESISTANCE: 100M Ω MIN 250V DC;
 - 3) CONTACT RESISTANCE: 40m Ω MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-30°C TO +80°C.
2. Mechanical:
- 1) Mating Force: 20N MAX.
 - 2) Umating Force: 6N MIN.
3. DIMENSIONS MARKED "V"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO

USCF-16*N-4BV605

1: Au 1U⁺
2: Au 3U⁺
5: Au 15U⁺
6: Au 30U⁺

1: PBT
2: PAPT
3: PAPT
4: LCP

W: WHITE
B: BLACK

W: WHITE
B: BLACK

W:WHITE
B:BLACK

5					.X ±0.30	.X' ±1'	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
4	HOOK	STAINLESS STEEL	1		.XX ±0.20	.XX'	MAT'L		TITLE: PART NO.: USB TYPE CF 短棒/35 单排 16P 四脚贴片 有弹 二次成型款 USCF-16XN-4BV605					
3	SHELL	STAINLESS STEEL	1		PLATED NICKEL	.XXX ±0.10	.XXX'	FINISH						SEE NOTE
2	TERMINAL	COPPER ALLOY	16	PLATED GOLD			SEE NOTE		DR: Rocky 2019/03/27 DWG NO.: AII-V605					
1	HOUSING	LCP+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR DISTRIBUTED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.					CHKD: Rocky 2019/03/27				
ND	PARTS	MATERIAL	QTY	FINISHING			APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING			
					1:1	1/1	B							

5					.X ±0.30	.X' ±1'	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
4	HOOK	STAINLESS STEEL	1		.XX ±0.20	.XX'	MAT'L		TITLE: PART NO.: USB TYPE CF 短棒/35 单排 16P 四脚贴片 有弹 二次成型款 USCF-16XN-4BV605				
3	SHELL	STAINLESS STEEL	1		PLATED NICKEL	.XXX ±0.10	.XXX'	FINISH					
2	TERMINAL	COPPER ALLOY	16	PLATED GOLD			SEE NOTE		DR: Rocky 2019/03/27 DWG NO.: AII-V605				
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY		CHKD: Rocky 2019/03/27 SCALE SHEET REV. CUSTOMER DRAWING				
NO	PARTS	MATERIAL	QTY	FINISHING			APPD:	1:1	1/1	B			

5					.X ±0.30	.X' ±1'	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
4	HOOK	STAINLESS STEEL	1		.XX ±0.20	.XX'	MAT'L		TITLE: PART NO.: USB TYPE CF 短棒J35 单排 16P 四脚贴片 有弹 二次成型款 USCF-16XN-4BV605				
3	SHELL	STAINLESS STEEL	1		PLATED NICKEL	.XXX ±0.10	.XXX'	FINISH					
2	TERMINAL	COPPER ALLOY	16	PLATED GOLD			SEE NOTE		DR: Rocky 2019/03/27 DWG NO.: AII-V605				
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY		CHKD: Rocky 2019/03/27 SCALE SHEET REV. CUSTOMER DRAWING				
NO	PARTS	MATERIAL	QTY	FINISHING			APPD:	1:1	1/1	B			

5					.X ±0.30	.X' ±1'	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
4	HOOK	STAINLESS STEEL	1		.XX ±0.20	.XX'	MAT'L		TITLE: PART NO.: USB TYPE CF 短棒/35 单排 16P 四脚贴片 有弹 二次成型款 USCF-16XN-4BV605				
3	SHELL	STAINLESS STEEL	1		PLATED NICKEL	.XXX ±0.10	.XXX'	FINISH					
2	TERMINAL	COPPER ALLOY	16	PLATED GOLD			SEE NOTE		DR: Rocky 2019/03/27 DWG NO.: AII-V605				
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY		CHKD: Rocky 2019/03/27 SCALE SHEET REV. CUSTOMER DRAWING				
NO	PARTS	MATERIAL	QTY	FINISHING			APPD:	1:1	1/1	B			

5					.X ±0.30	.X' ±1'	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
4	HOOK	STAINLESS STEEL	1		.XX ±0.20	.XX'	MAT'L		TITLE: PART NO.: USB TYPE CF 短棒J35 单排 16P 四脚贴片 有弹 二次成型款 USCF-16XN-4BV605				
3	SHELL	STAINLESS STEEL	1		PLATED NICKEL	.XXX ±0.10	.XXX'	FINISH					
2	TERMINAL	COPPER ALLOY	16	PLATED GOLD			SEE NOTE		DR: Rocky 2019/03/27 DWG NO.: AII-V605				
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY		CHKD: Rocky 2019/03/27 SCALE SHEET REV. CUSTOMER DRAWING				
NO	PARTS	MATERIAL	QTY	FINISHING			APPD:	1:1	1/1	B			

REV.	ECN.	NO.	APPD.