

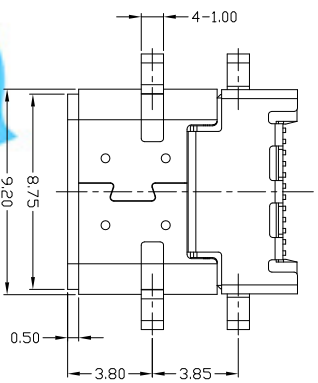

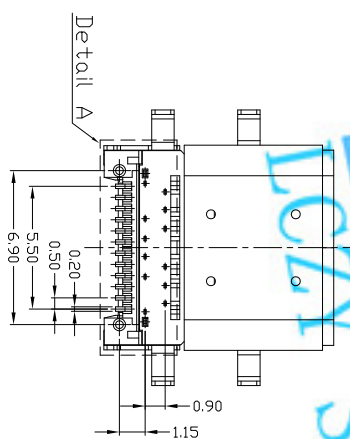
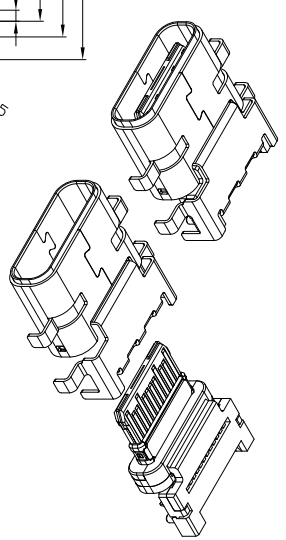


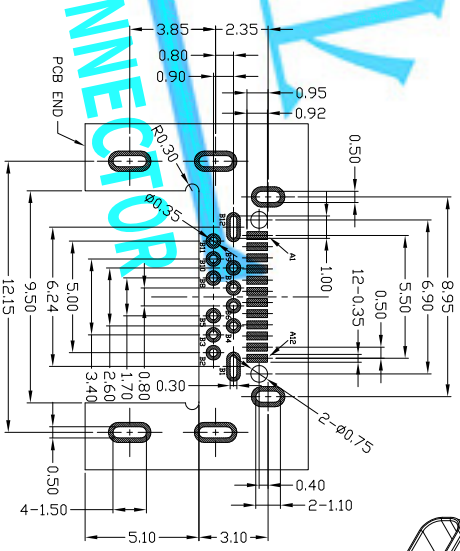

Signal Name	PIN	Signal Name	PIN
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

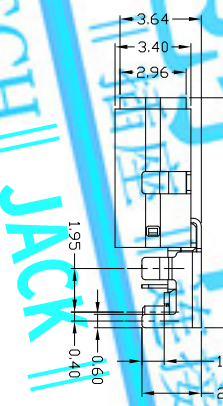

(Tol:(±0.05))

PCB LAYOUT (RECOMMENDED)

Bill of materials:

6	SHRAPNEL	STAINLESS STEEL	1	PLATED NICKEL	X: ±0.35	X: ±2°	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
5	HOOK	STAINLESS STEEL	1	PLATED NICKEL	X: ±0.3	X: ±1°	MAT'L					
4	SHELL-2	STAINLESS STEEL	1	PLATED NICKEL/TIN	.XX ±0.25	.XX°	SEE NDTE					
3	SHELL-1	STAINLESS STEEL	1	PLATED NICKEL/TIN	.XXX ±0.15	.XXX°	FINISH					
2	TERMINAL	COPPER ALLOY	24	PLATED GOLD/TIN			SEE NOTE		TITLE:	USCF-246N-4B VH06	PART NO.:	
1	HOUSING	SYNTHETIC RESIN LCP+30%GF	1	UL 94V-0			Q'TY		DR:	2018/06/23	DWG NO.:	
ND	PARTS	MATERIAL	QTY	FINISHING			APPD:		CHKD:	2018/06/23	SCALE	
										1:1	SHEET	
										1/1	REV.	
											B	CUSTOMER DRAWING

- NOTES:
- ELECTRICAL:
 - CURRENT RATING:1.5AMP;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-30℃ TD +80℃.
 - Mechanical:
 - Mating Force: 5~20N MAX.
 - Umating Force: 8~20N MIN.
 - Durability: 10000 cycles MIN.
 - DIMENSIONS MARKED "▼" TD BE CHECKED BY Q.C & IPQC.
4. PART ND.

