

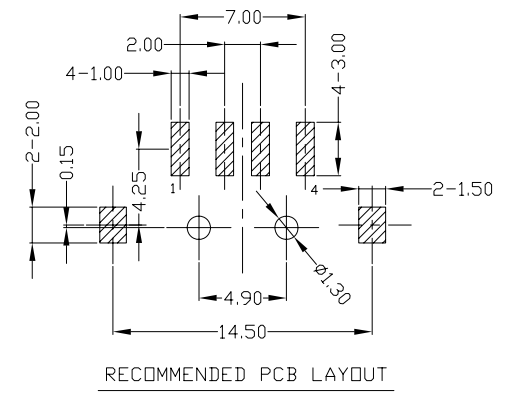








RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

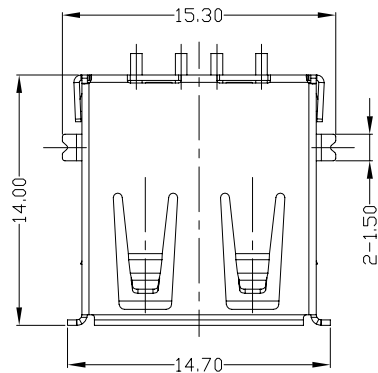

RECOMMENDED PCB LAYOUT

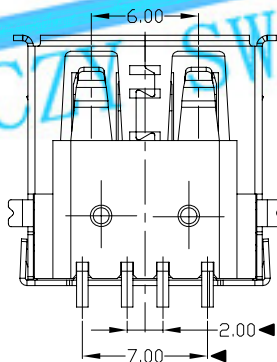

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP,30V AC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO

USAF-04*N-4*V62

W:WHITE
B:BLACK
1:Au 1U"
6:Au 30U"
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
					.X ±0.3	.X* ±1*	mm				
3	HOUSING	LCP	1	UL94V-0	.XX ±0.25	.XX*	MAT'L	TITLE: USB A/F SMT TYPE全贴 鱼叉脚			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX*	SEE NOTE				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		FINISH	PART NO.: USAF-04*N-4*V62			
NO	PARTS	MATERIAL	QTY	FINISHING			SEE NOTE				
							Q'TY	DWG NO.: AII-V62			
							⊕ - ∟	SCALE SHEET REV. CUSTOMER DRAWING			
								1:1 1/1 B			