




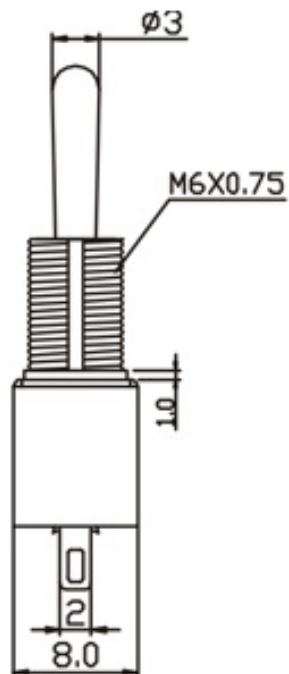

REV	DESCRIPTION	DESIGNER	DATE	自由公差		
				区分 \ 类别		公差
				0	<0.5	±0.10
				0.50	<5	±0.15
				5.0	<10	±0.20
				10.0	<20	±0.30
				20.0	<50	±0.40
				未标注R角		R0.2
				未标注角度公差		±1°

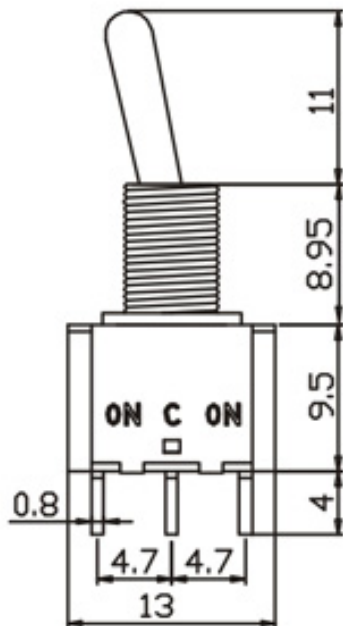

技術特性 Specification

- 1.规格 Rating:6A 125VAC;3A 250VAC
- 2.接触电阻 Contact Resistance:20mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 1000MΩ min
- 4.耐电压 Dielectric Strength:1500VAC ,1Minute
- 5.操作温度 Operating Temperature:-25℃ ~ +85℃
- 6.电气寿命 Electrical Life:10,000 Cycles

SCALE	1:1		UNIT: mm
APVD		DATE	2017-5-22
CKD	单世佳	DWN	徐耀飞
SPECIFICATION NO.	ZF-ZRS-		
DESCRIPTION	TOGGLE SWITCH		
MODEL NO.	MTS-102-A1-TO		
PART No.	SPDT 3P		
LONGCHUANG ZHONGYE (HK)CO.,LIMITED			