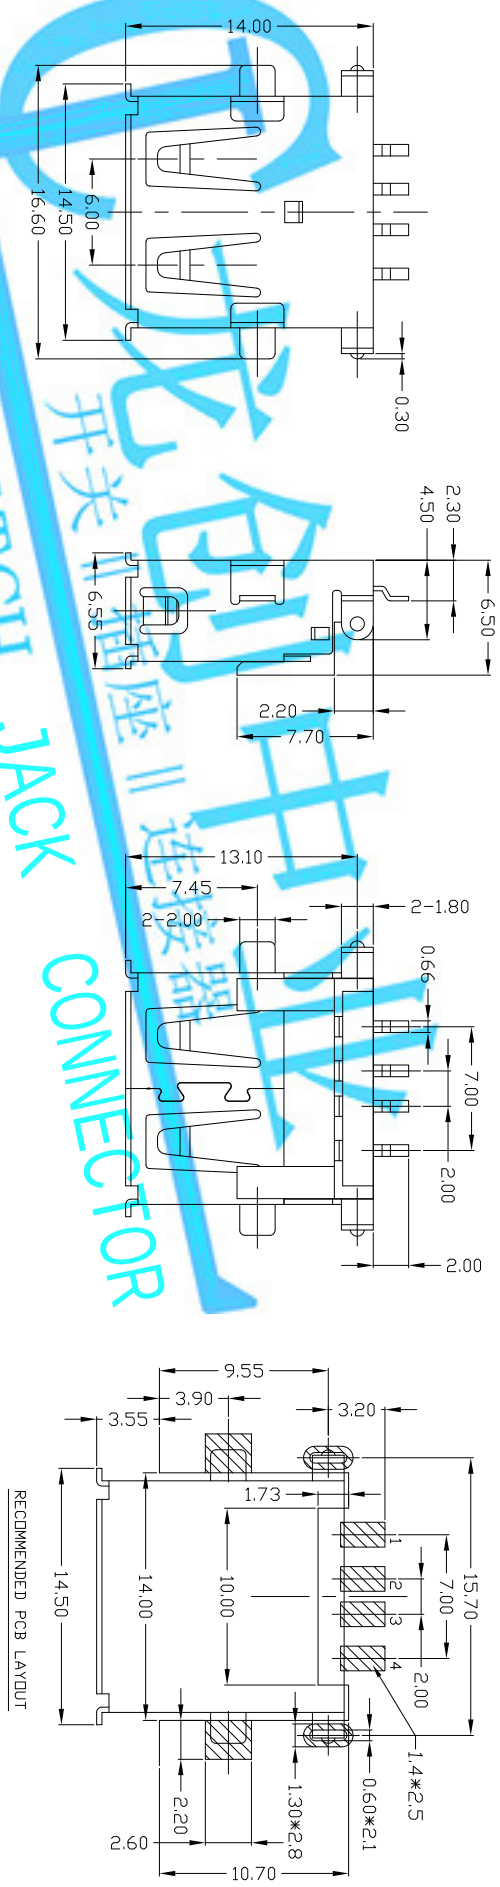


- NOTES:
1. ELECTRICAL:

1) VOLTAGE CURRENT RATING:2AMP,30V AC;

2) INSULATION RESISTANCE: 1000MΩMIN;

3) CONTACT RESISTANCE: 30mΩMAX;

4) WITHSTANDING VOLTAGE: 500V AC;

5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:

1) Mating Force: 35N MAX

2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
4. PART NO.

USAF-04*N-2*V33

14u 1U" 64u 30U"

W:WHITE B:BLACK 1P:BT 2P:PA6T 3P:PA9T 4L:CP

Bill of materials:

					X. ±0.35	X. ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
					X. ±0.3	X. ±1°	MAT'L	TITLE:			
3	HOUSING	PA6T/PBT+30%GF	1	UL 94 V-0	.XX ±0.25	.XX°	SEE NOTE	USB AF SMT 破板贴片式			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX°	FINISH	DR: 2014/09/20			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN			SEE NOTE	CHKD: 2014/09/20			
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	APPD: 2014/09/20			
								SCALE SHEET REV. 1:1			
								CUSTOMER DRAWING			