

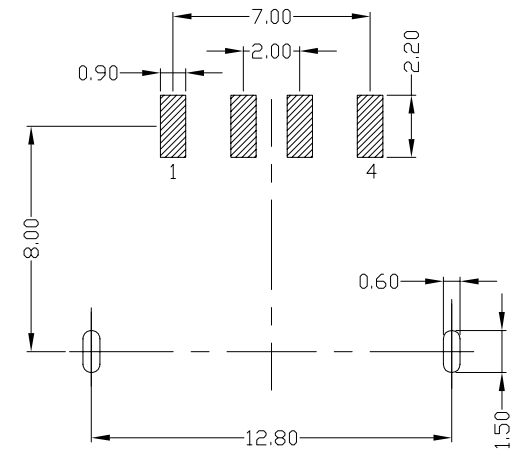


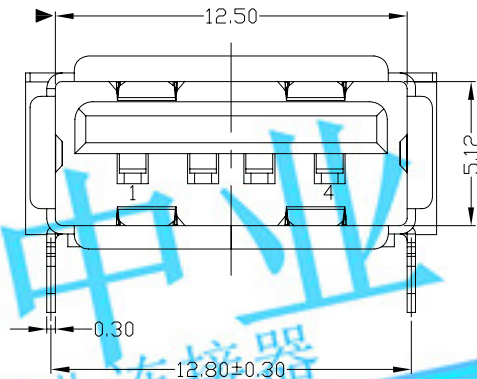


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

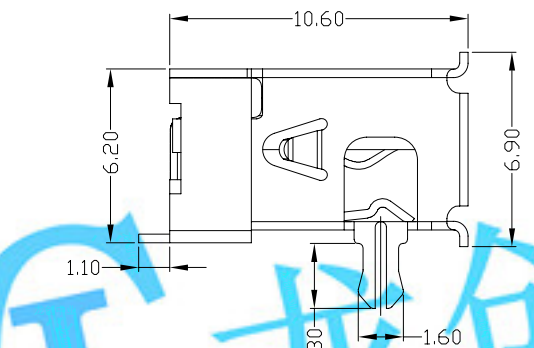

RECOMMENDED PCB LAYOUT

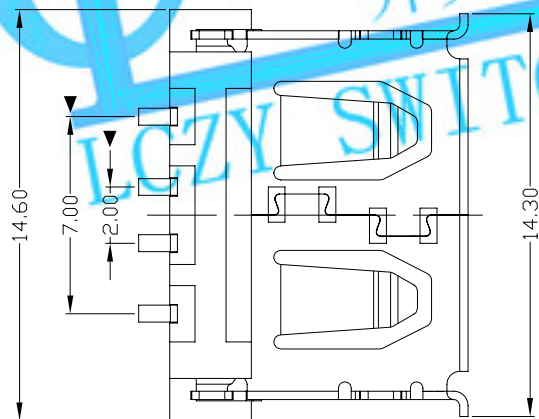

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-**V802

1: Au 1U"
6: Au 30U"

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35 .X ±0.3 .XX ±0.25 .XXX ±0.15	X.* ±2* .X.* ±1* .XX* .XXX*	UNITS mm	MAT'L SEE NOTE	FINISH SEE NOTE	Q'TY	LONGCHUANG ZHONGYE (HK) CO., LIMITED				
											TITLE: USB AF 90度 SMT 短体2脚鱼叉脚 (10.6正向) 有卷边				
3	HOUSING	LCP/PBT	1	UL94V-0							PART NO.: USAF-04*N-**V802				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL							DWG NO.: AII-V802				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN							DR: gan 2012/7/03				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.											CHKD: gan 2012/7/03				
											APPD:				
											SCALE	SHEET	REV.	CUSTOMER DRAWING	
											1:1	1/1	B		