

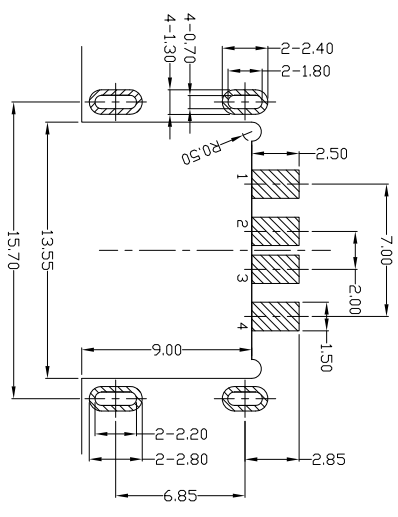
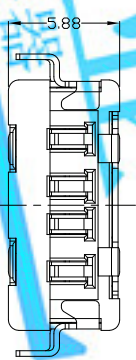

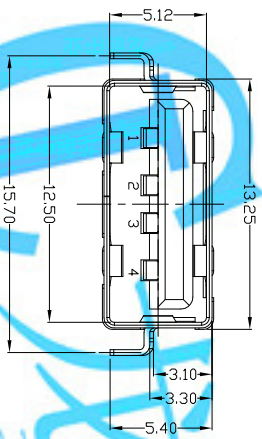



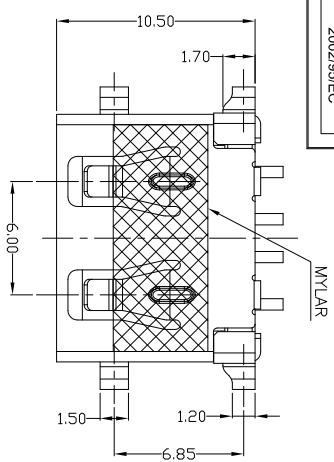


RECOMMENDED PCB LAYOUT



- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:2AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-25℃ TD +85℃.
 - Mechanical:
 - Mating Force: 35N MAX
 - Umating Force: 10N MIN.
 - NOTE:1.DIMENSIONS MARKED "▼" TD BE CHECKED BY Q/C & IPQC.

4.PART NO.



Bill of materials:

3	HOUSING	LCP+30%GF	1	UL94V-0	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	
NO	PARTS	MATERIAL	QTY	FINISHING	

	X: ±0.35	X': ±2'	UNITS	mm
	.X ±0.3	.X' ±1'	MAT'L	
	.XX ±0.25	.XX'	SEE NOTE	
	.XXX ±0.15	.XXX'	FINISH	
			SEE NOTE	
			Q'TY	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED				PART NO.:		USAF-041N-4BVS40	
TITLE:				DR:		USAF-041N-4BVS40	
USB2.0 AF SMT 沉板 HS.6 带吸胶				CHKD:		DWG NO.:	
2018/07/12				2018/07/12		AI1-VS40	
APPD:				SCALE		SHEET	
1:1				1/1		REV.	
						CUSTOMER	
						DRAWING	