
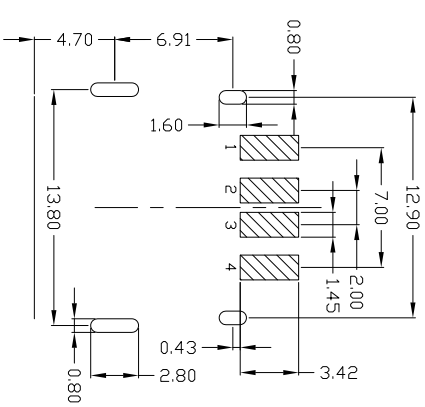
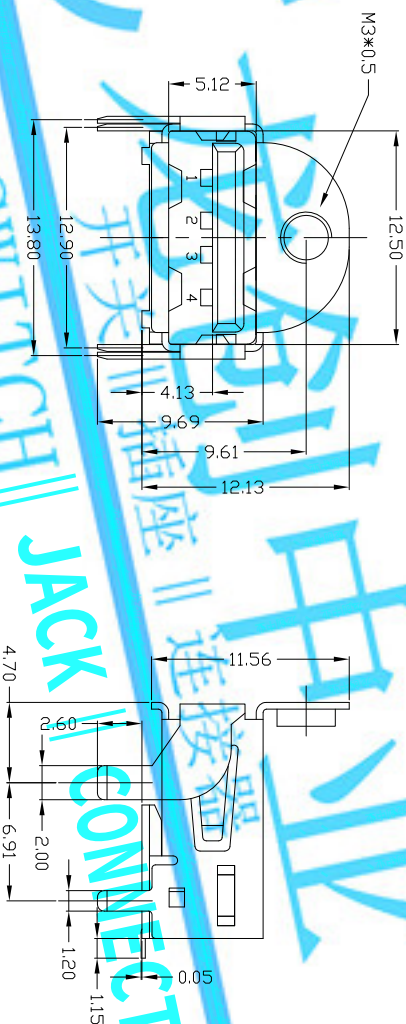


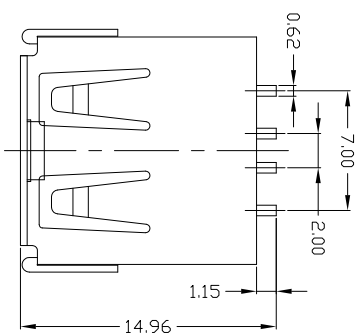

RECOMMENDED PCB LAYOUT

3	HOUSING	LCP/PBT+30%GF	1	UL94V-0	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	
NO	PARTS	MATERIAL	QTY	FINISHING	

X. ± 0.35	X. $\pm 2^{\circ}$	UNITS
		mm
.X ± 0.3	.X' $\pm 1^{\circ}$	MAT'L
.XX ± 0.25	.XX'	SEE NOTE
.XXX ± 0.15	.XXX'	FINISH
		SEE NOTE
Q'TY		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF THE MANUFACTURING COMPANY AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE MANUFACTURING CO.		
		
		

LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
TITLE:		PART NO.:	
USB AF 90度插板 (攻牙)		USAF-04*1-4*V35	
DR:	gan 2014/09/16	DWG NO.:	
CHKD:	gan 2014/09/16	AII-V35	
APPD:		SCALE	SHEET
		1:1	1/1
		B	REV.
			CUSTOMER
			DRAWING

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING:2AMP,30V AC;
- 2) INSULATION RESISTANCE: 1000 Ω MIN;
- 3) CONTACT RESISTANCE: 30m Ω MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
2) Umating Force: 10N MIN.
3. DIMENSIONS MARKED "▲" TO BE CHECKED
BY Q.C & IPQC.

4. PART NO.

USAF-04*N-4*V35

1Au 1U*
6Au 30U*