



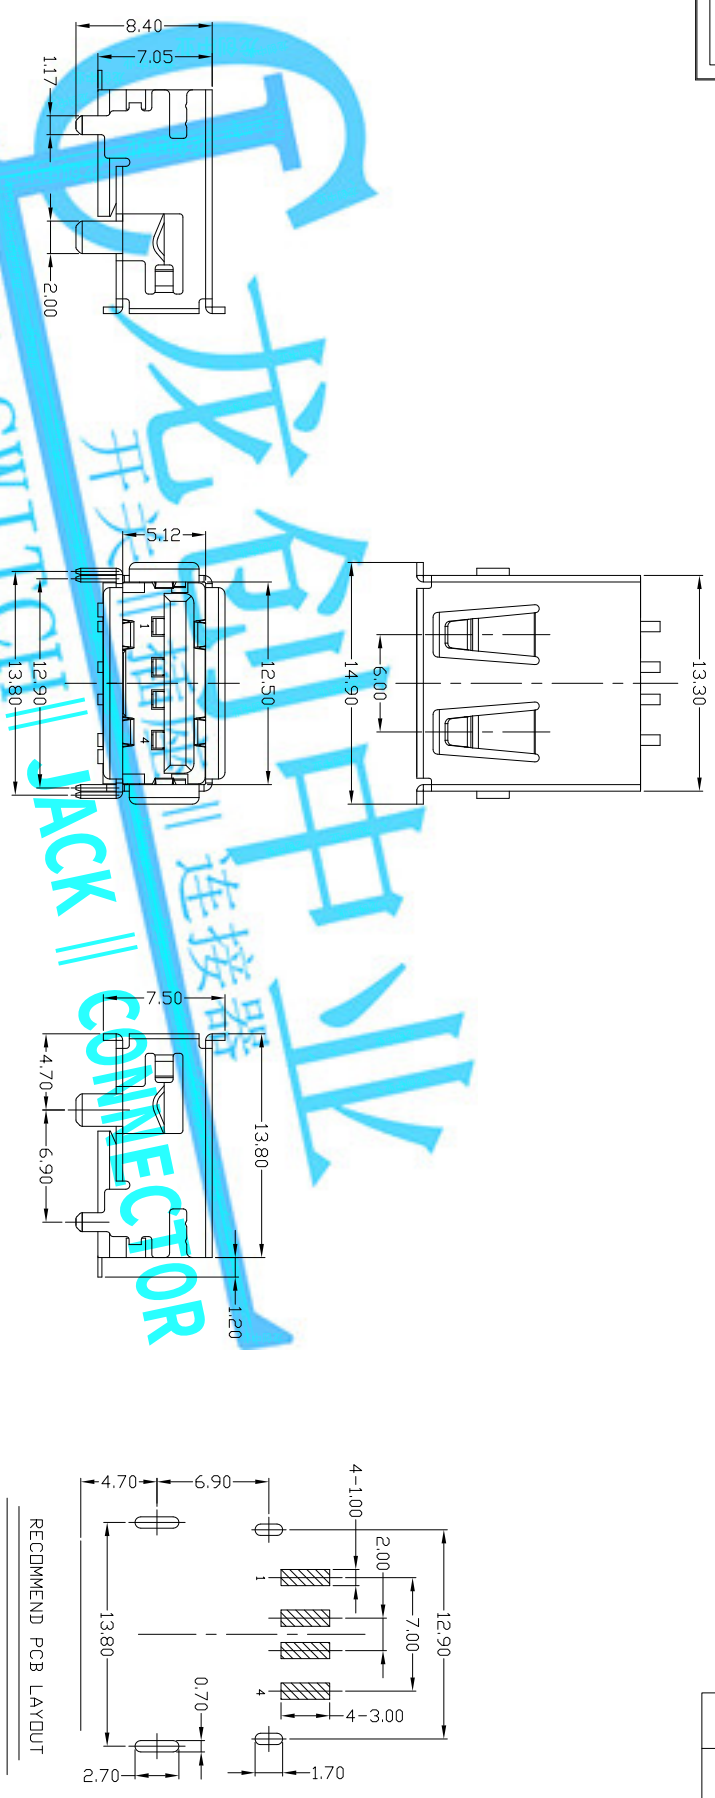

- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING: 2.0AMP,30V AC;
  - 2) INSULATION RESISTANCE: 1000M $\Omega$  MIN;
  - 3) CONTACT RESISTANCE: 30m $\Omega$  MAX;
  - 4) WITHSTANDING VOLTAGE: 500V AC;
  - 5) OPERATING TEMPERATURE:-55℃ TD +85℃.
2. Mechanical:
- 1) Mating Force: 35N MAX
  - 2) Unmating Force: 10N MIN.
  - 3. DIMENSIONS MARKED '▼' TD BE CHECKED BY Q.C & IPQC.

4.PART NO.



Bill of materials:

| NO | PARTS    | MATERIAL     | QTY | FINISHING         | UNITS    | mm       | TITLE:              | PART NO.:       | SCALE | SHEET | REV. | CUSTOMER |
|----|----------|--------------|-----|-------------------|----------|----------|---------------------|-----------------|-------|-------|------|----------|
| 1  | TERMINAL | COPPER ALLOY | 4   | PLATED GOLD/TIN   | SEE NOTE | SEE NOTE | DR: gan 2017/3/15   | USAF-04XT-4XV40 | 1:1   | 1/1   | B    | DRAWING  |
| 2  | SHELL    | SPCC         | 1   | PLATED TIN/NICKEL | SEE NOTE | SEE NOTE | CHKD: gan 2017/3/15 | USAF-04XT-4XV40 | 1:1   | 1/1   | B    | DRAWING  |
| 3  | HOUSING  | LCP+30%GF    | 1   | UL94V-0           | SEE NOTE | SEE NOTE | APPD: gan 2017/3/15 | USAF-04XT-4XV40 | 1:1   | 1/1   | B    | DRAWING  |
| 4  | PARTS    | MATERIAL     | QTY | FINISHING         | UNITS    | mm       | TITLE:              | PART NO.:       | SCALE | SHEET | REV. | CUSTOMER |