
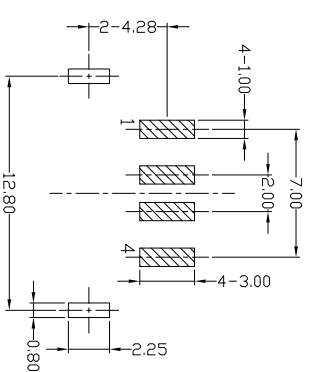

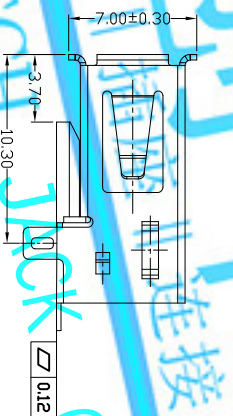


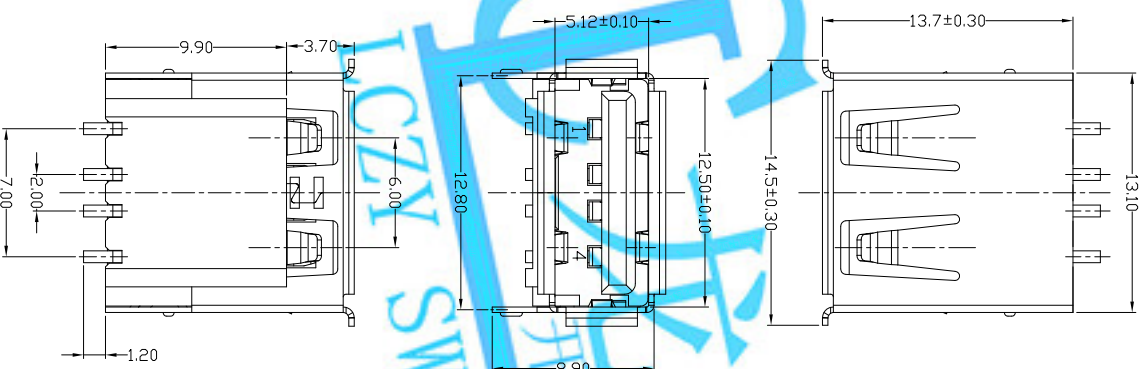

RECOMMENDED P.C.B. LAYOUT

NOTES:

1. ELECTRICAL:

1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;

2) INSULATION RESISTANCE: 1000M Ω MIN;

3) CONTACT RESISTANCE: 30mΩ MAX;

4) WITHSTANDING VOLTAGE: 500V AC;

5) OPERATING TEMPERATURE:- -55°C TO $+85^{\circ}\text{C}$

2. Mechanical

1) Mating Force: 35N MAX

2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▲"

TO BE CHECKED BY Q.C. & IPQC.

4.PART NO.

USAF-04*N-4XV613

— W:WHITE
B:BLACK

1:AU 1U*	1:PB
6:AU 30U*	2:PA6T

3:PA9T

4:LCF

5				
4				
3	HOUSING	LCP+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

.X ±0.30	.X* ±1*	UNITS	mm
.XX ±0.20	.XX*	MAT'L	
.XXX ±0.10	.XXX*	SEE NOTE	
		FINISH	
		SEE NOTE	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INDUSTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF ACCURATE INDUSTECH INC.			
		Q'TY	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
TITLE: USB AF SMT 型直插有凸包无柱 端子-外-规格:20		PART NO.: USAF-041N-4XV613	
DR: <i>Sucky</i>	2017/12/13	DWG NO.: A11-V613	
CHKD: <i>Sucky</i>	2017/12/13	SCALE	
APPD:		1:1	1/1
		B	CUSTOMER DRAWING

REV.	ECN.	NO.	APPD.