
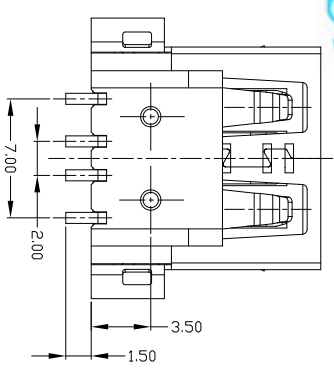


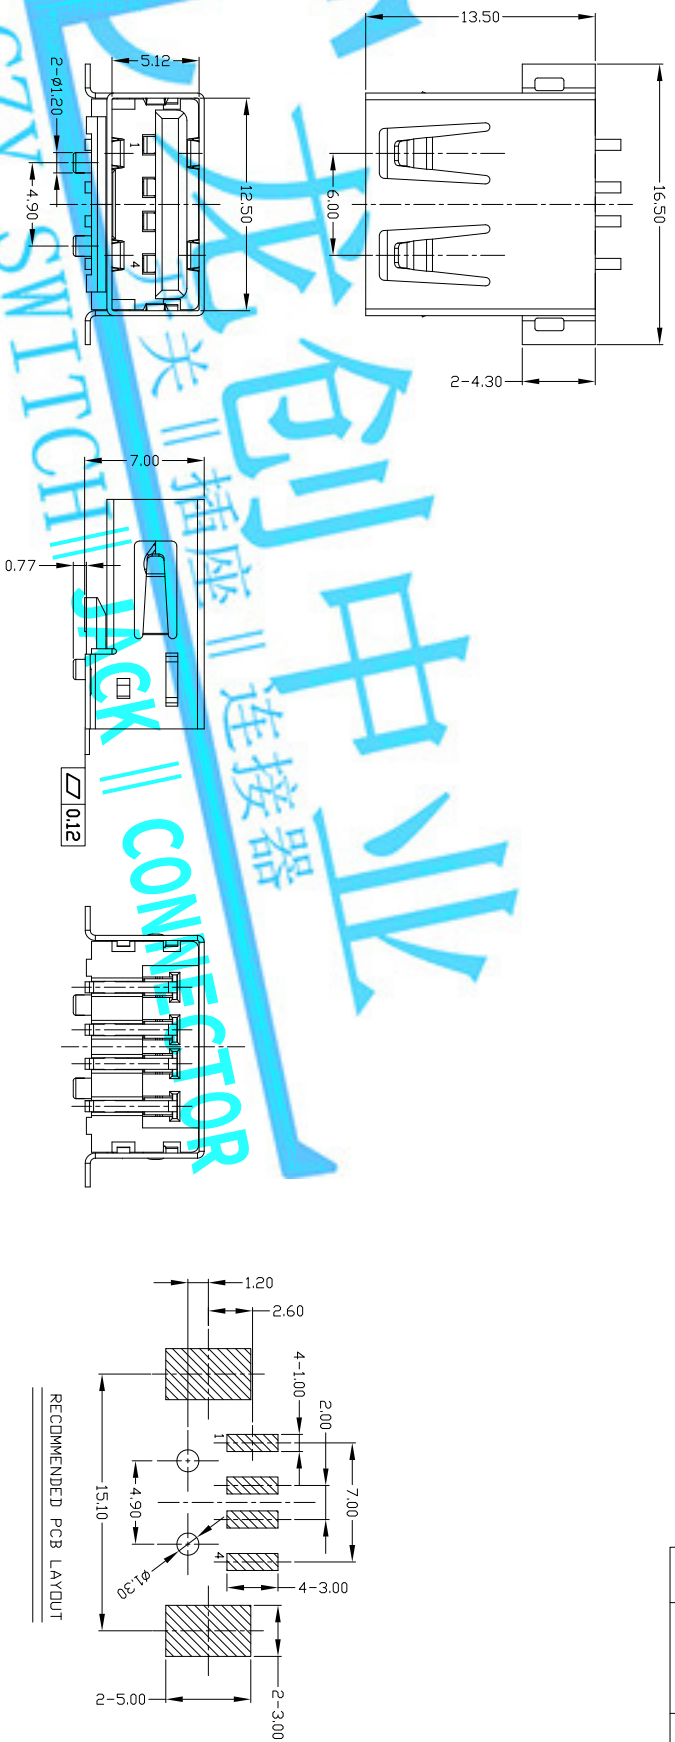

NOTES:

1. ELECTRICAL:

1) VOLTAGE CURRENT RATING:2AMP,30V AC;

2) INSULATION RESISTANCE: 1000M Ω MIN;

3) CONTACT RESISTANCE: 30m Ω MAX;

4) WITHSTANDING VOLTAGE: 500V AC;

5) OPERATING TEMPERATURE:-55°C TD +85°C.

2. Mechanical:

1) Mating Force: 35N MAX

2) Umating Force: 10N MIN.

3. NOTE:1.DIMENSIONS MARKED "▼"
TD BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04*N-4*V609

1Au 1u"
6Au 30u"

W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCF

Bill of materials:

3	HOUSING	LCP+30%GF	1	UL94V-0	X: ±0.35 X: ±0.3	X: ±2° X: ±1°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XX ±0.25 .XXX ±0.15	.XX° .XXX°	SEE NDTE FINISH	TITLE: USB A/F SWT型 方脚全贴式无差边 1.2柱牙 (端子外圆1.80)	PART NO.:	USAF-04*N-4*V609	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. OR USED IN ANY MANNER WITHOUT THE INNOTECH INC.			DR: gan 2016/04/07	DWG NO.:	A11-V609	
ND	PARTS	MATERIAL	QTY	FINISHING	SEE NOTE			CHKD: gan 2016/04/07	SCALE	SHEET	REV.
					1:1			APPD:	1/1	B	CUSTOMER DRAWING