

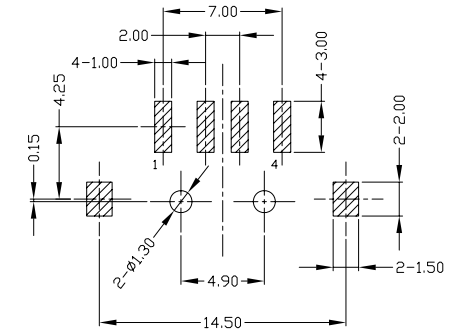








RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

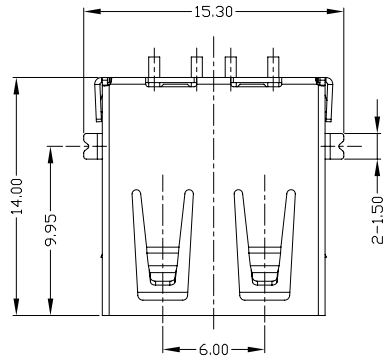

RECOMMENDED PCB LAYOUT

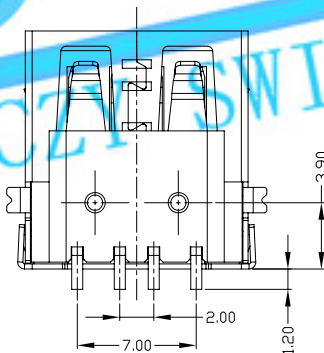

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-4*V608

1: Au 1U*
6: Au 30U*
W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

3	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
					.X ±0.3	.X.* ±1*	MAT'L						
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XX ±0.25	.XX*	SEE NOTE	TITLE:		PART NO.:			
					.XXX ±0.15	.XXX*	FINISH	USB AF SMT鱼叉脚 全贴式无卷边		USAF-04*N-4*V608			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	DR: gan 2016/04/07		DWG NO.:			
							Q'TY	CHKD: gan 2016/04/07		AII-V608			
NO	PARTS	MATERIAL	QTY	FINISHING				APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
										1:1	1/1	B	