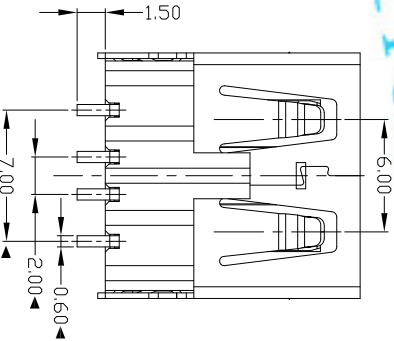
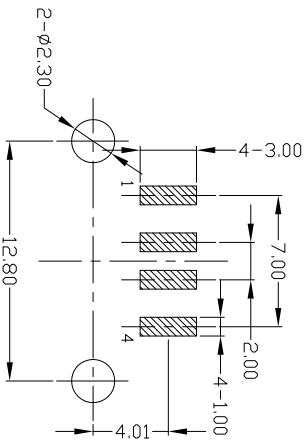

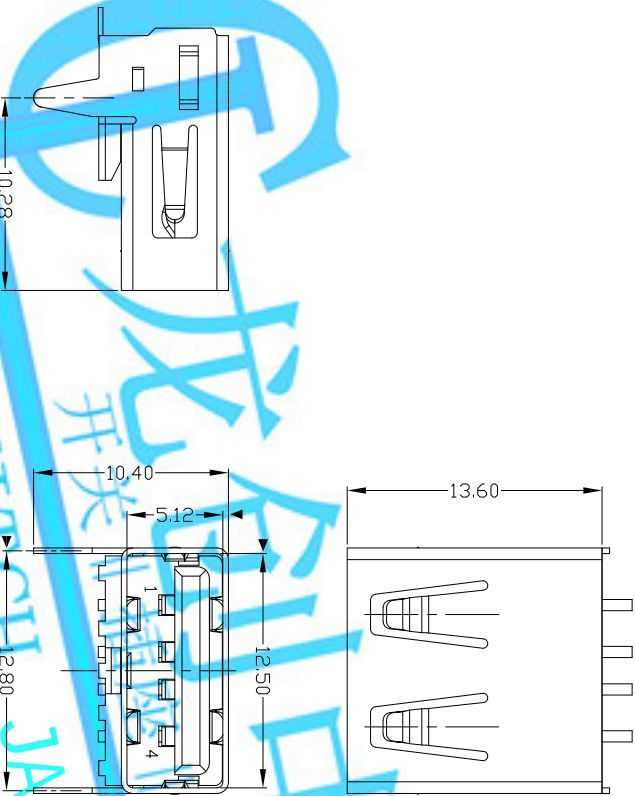


- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING:2AMP,30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04*N-4*V601

14u 1U*
64u 30U*

W:WHITE
B:BLACK
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

3	HOUSING	LCP	1	UL 94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
ND	PARTS	MATERIAL	QTY	FINISHING

X: ±0.35	X': ±2'	UNITS
X ±0.3	X' ±1'	mm
.XX ±0.25	.XX'	MAT'L
.XXX ±0.15	.XXX'	SEE NOTE
		FINISH
		SEE NOTE
		Q'TY

LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
TITLE:		PART NO.:	
USB AF SMT T型 直脚无后盖平口		USAF-04*N-4*V601	
DR: Rocky 2014/04/10		DWG NO.:	
CHKD: Rocky 2014/04/10		A11-V601	
APPD: Rocky 2014/04/10		SCALE SHEET REV. B	
		CUSTOMER DRAWING	