RoHS Compliant 2002/95/EC

Process Capable

REV	LTR	DESCRIPTION	DATE	APPROVED

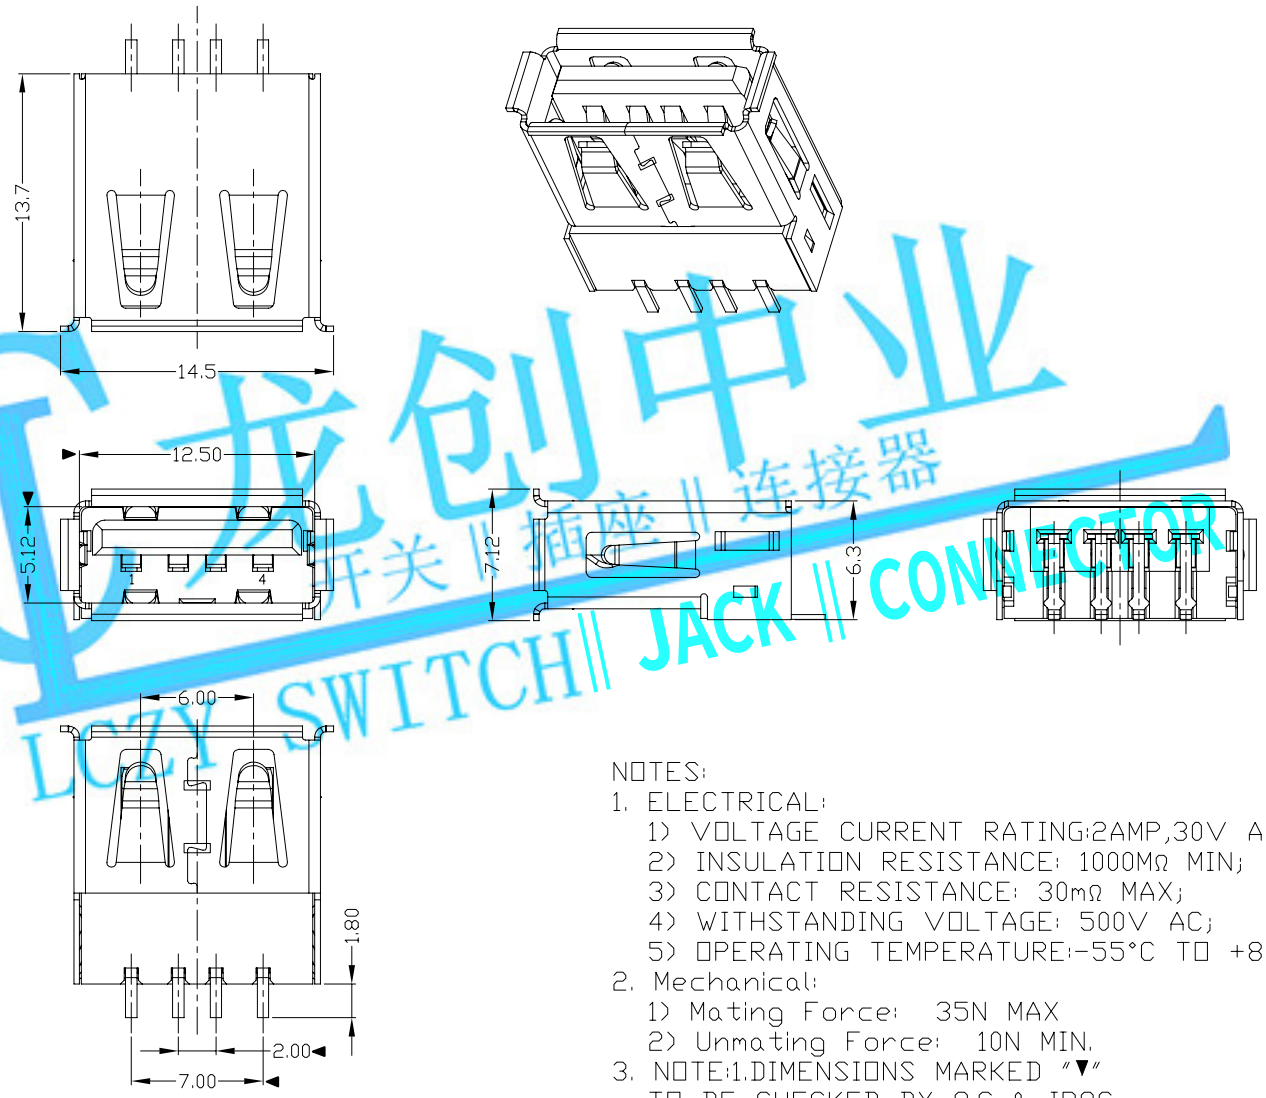

龙创中业
开关‖插座‖连接器
LCZY SWITCH‖ JACK ‖ CONNECTOR



RECOMMENDED PCB LAYOUT

NOTES:

1. ELECTRICAL:
   1) VOLTAGE CURRENT RATING:2AMP,30V AC;
   2) INSULATION RESISTANCE: 1000MΩ MIN;
   3) CONTACT RESISTANCE: 30mΩ MAX;
   4) WITHSTANDING VOLTAGE: 500V AC;
   5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
   1) Mating Force: 35N MAX
   2) Unmating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04*N-4*V68

- 1:Au 1U"
  6:Au 30U"
- W:WHITE
  B:BLACK
- 1:PBT
  2:PA6T
  3:PA9T
  4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	LCP	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

X. ±0.35	X.° ±2°
.X ±0.3	.X° ±1°
.XX ±0.25	.XX°
.XXX ±0.15	.XXX°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE: USB A/F SMT型 一型 无脚 无后盖	PART NO.: USAF-04*N-4*V68
DR: gan 2012/6/30	DWG NO.: AII-V68
CHKD: gan 2012/6/30	
APPD:	

SCALE	SHEET	REV.	
1:1	1/1	B	CUSTOMER DRAWING