

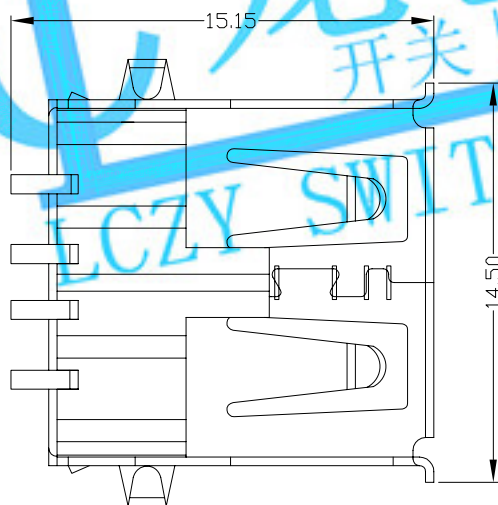


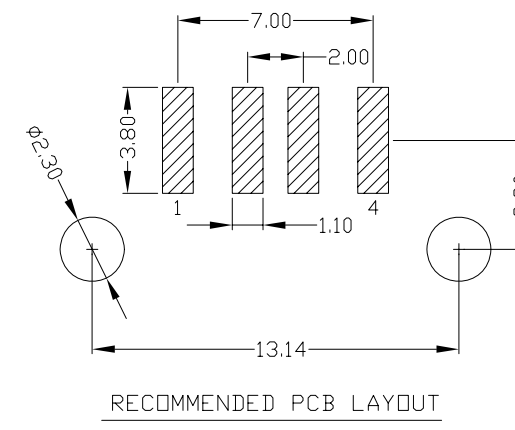

REV.	ECN.	NO.	APPD.

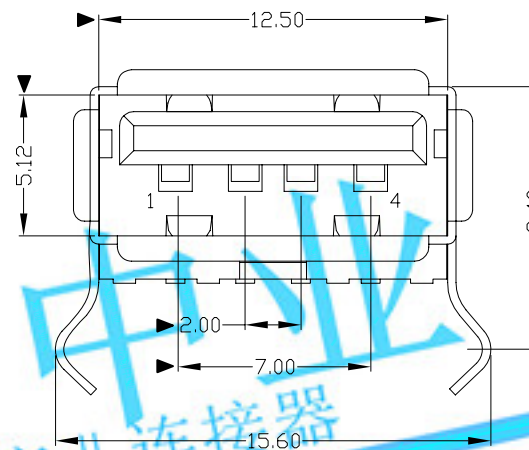

JACK CONNECTOR

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000M Ω MIN;
- 3) CONTACT RESISTANCE: 30m Ω MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-**V80

$$\begin{array}{r} 1:\text{Au} \quad 1\text{U}'' \\ 6:\text{Au} \quad 30\text{U}'' \end{array}$$

— W:WHITE
B:BLACK

— 1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

3	HOUSING	LCP/PBT	1	UL94V-0	X. ±0.35	X.* ±2*	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X* ±1*	SEE NOTE	TITLE:		PART NO.:			
					.XX ±0.25	.XX*		USB A/F 90° SMT(加盖弯脚)		USAF-04*N-*×V80			
					.XXX ±0.15	.XXX*	FINISH	DR:		DWG NO.:			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	gan 2012/7/03		AII-V80			
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	CHKD:					
							gan 2012/7/03		SCALE		SHEET	REV.	CUSTOMER DRAWING
							APPD:		1:1		1/1	B	