


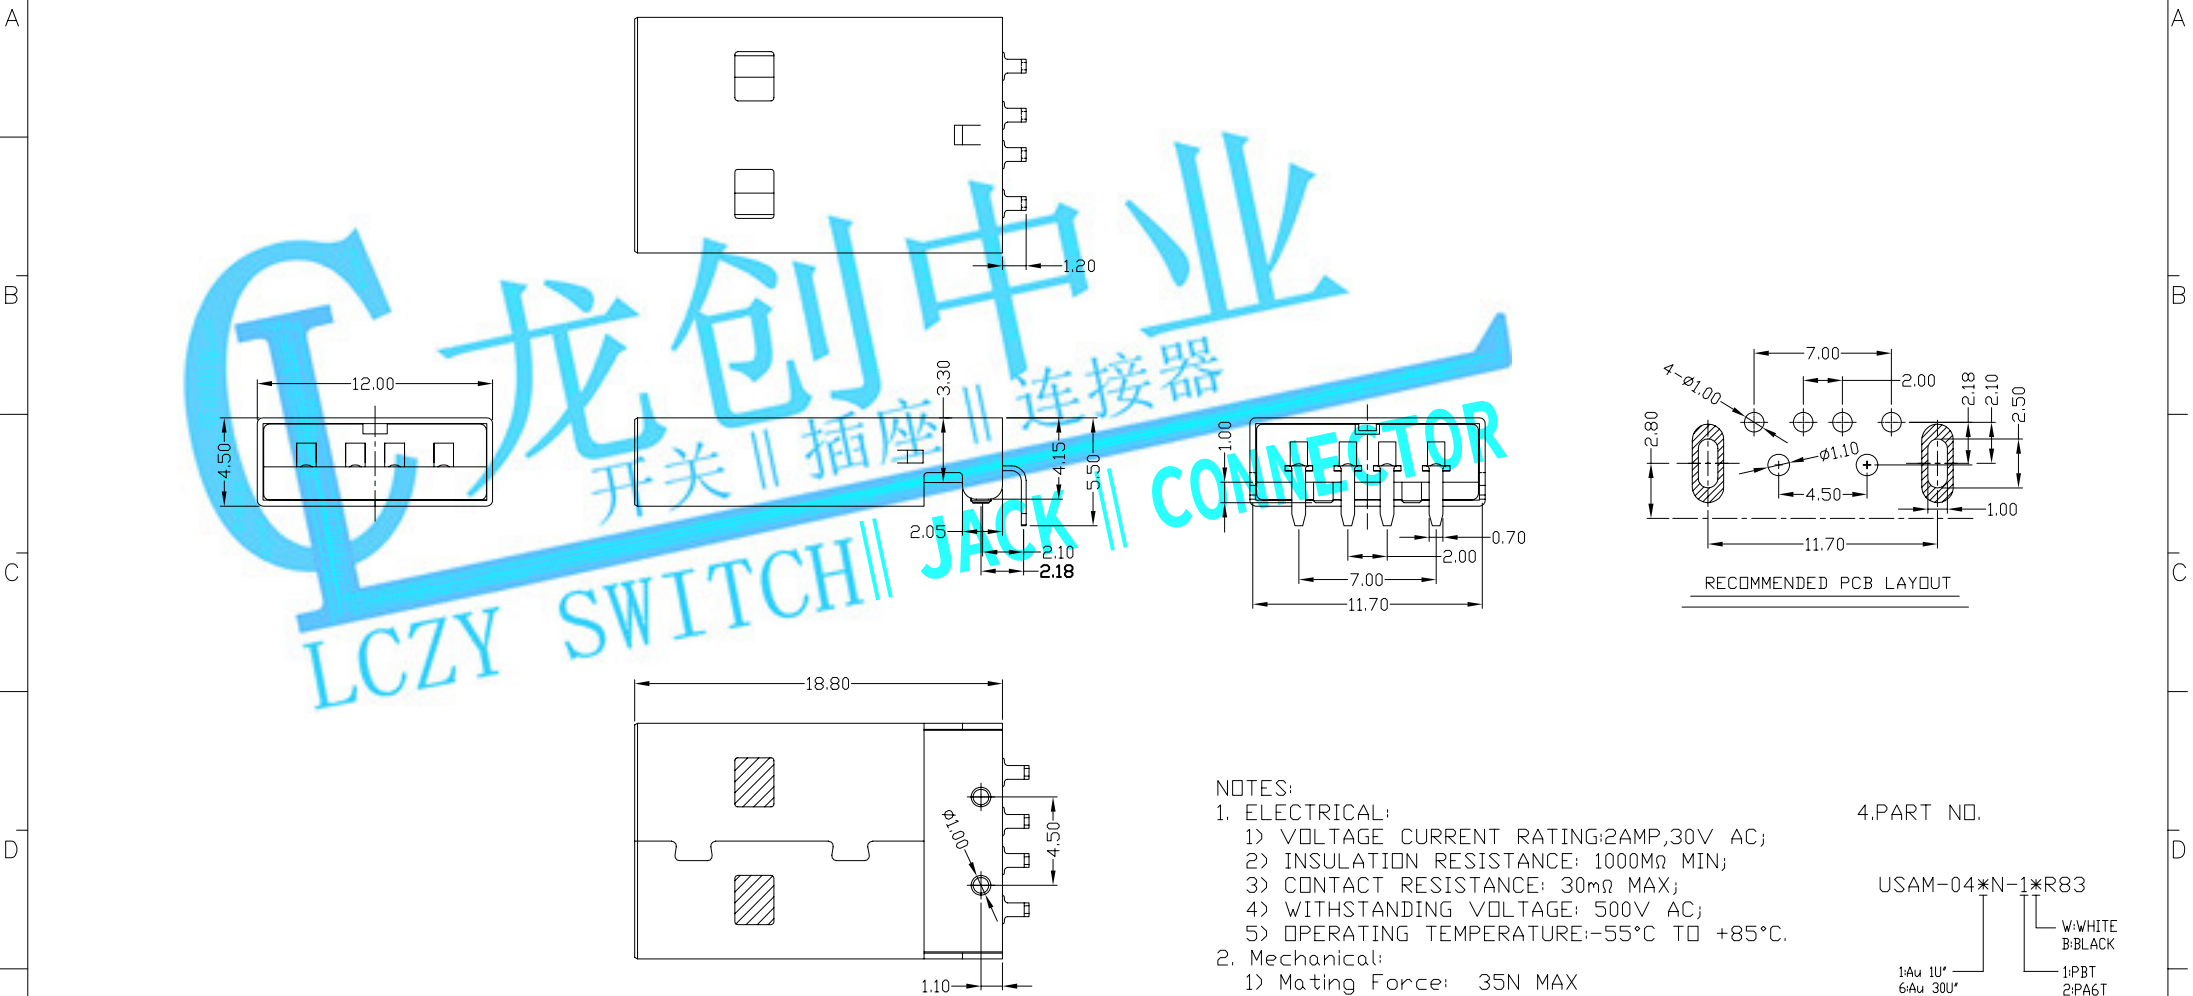

NOTES:

1. ELECTRICAL:

1) VOLTAGE CURRENT RATING:2AMP,30V AC;

2) INSULATION RESISTANCE: 1000MΩ MIN;

3) CONTACT RESISTANCE: 30mΩ MAX;

4) WITHSTANDING VOLTAGE: 500V AC;

5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

1) Mating Force: 35N MAX

2) Unmating Force: 10N MIN.

3. NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAM-04*N-1*R83

1Au 1U*
6Au 30U*

W:WHITE
B:BLACK

1-PBT
2-PA6T
3-PA9T
4-LCP

Bill of materials:

E	3	HOUSING	PBT/LCP+30%GF	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
	2	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X.* ±1*	MAT'L					
	1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX*	SEE NOTE					
	NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX*	FINISH					
						THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.			Q'TY	DR: gan 2013/5/4	PART NO.: USAM-04*N-1*R83		
									CHKD: gan 2013/5/4	DWG NO.: AII-R83			CUSTOMER DRAWING
									APPD:	SCALE 1:1	SHEET 1/1	REV. B	