
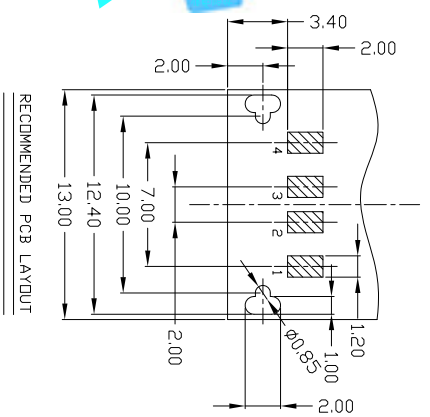

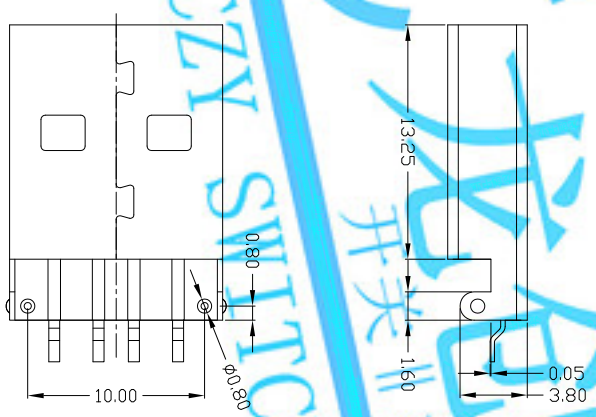


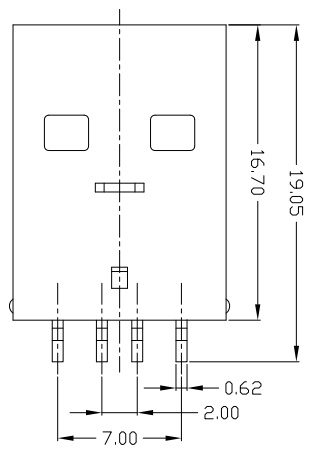

龙创中业
开关插座
LCZY SWITCH JACK CONNECTOR

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
		UNITS		mm					
				MAT'L					
3	HOUSING	LCP/PA6T/PBT+30%GF	1	UL94V-0	SEE NOTE		TITLE: USB AM SMT 直脚打头 04-2 PART NO.: USAM-04*N-4*V32		
2	SHELL	SPCC	1	PLATED NICKEL	FINISH				
				X. ±0.35		X. ±2*			
				.X ±0.3		.X* ±1*			
				.XX ±0.25		.XX*			
				.XXX ±0.15		.XXX*			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	SEE NOTE		DR: gyan 2014/09/20 DWG NO.: A11-V32		
				Q'TY		CHKD: gyan 2014/09/20			
ND	PARTS	MATERIAL	QTY	FINISHING	APPD:		SCALE SHEET REV. CUSTOMER DRAWING		
							1:1 1/1 B		

- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING:2AMP,30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩMIN;
 - 3) CONTACT RESISTANCE: 30mΩMAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAM-04*N-4*V32

1Au 10" 6Au 30u"

W/WHITE B/LACK 1PBT 2P/PA6T 3P/PA9T 4LCP

TITLE:		PART NO.:	
DR: USB AM SMT 直脚打头 014-2		USAM-04*N-4*V32	
CHKD: gao 2014/09/20		DWG NO.:	
APPD: gao 2014/09/20		A11-V32	
SCALE		SHEET	
1:1		1/1	
REV.		B	
CUSTOMER		DRAWING	