




REV.	ECN.	NO.	APPD.

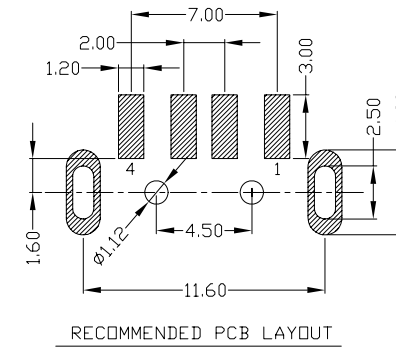

1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000M Ω MIN;
 - 3) CONTACT RESISTANCE: 30m Ω MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
3. NOTE: 1. DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.
4. PART NO.

1: Au 1U^o
6: Au 30U^o

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

3	HOUSING	LCP	1	UL94V-0	X. ± 0.35	X.* $\pm 2^*$	UNITS mm
2	SHELL	SPCC	1	PLATED NICKEL	.X ± 0.3	.X.* $\pm 1^*$	MAT'L
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ± 0.25	.XX*	SEE NOTE
					.XXX ± 0.15	.XXX*	FINISH
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY

TITLE: USB AM 90° SMT 弯脚 胶芯 1.2		PART NO.: USAM-04*N-4*H80				
DR: gan 2012/7/04		DWG NO.: AII-H80				
CHKD: gan 2012/7/04		SCALE		SHEET	REV.	CUS DR
APPD:		1:1	1/1	B		