


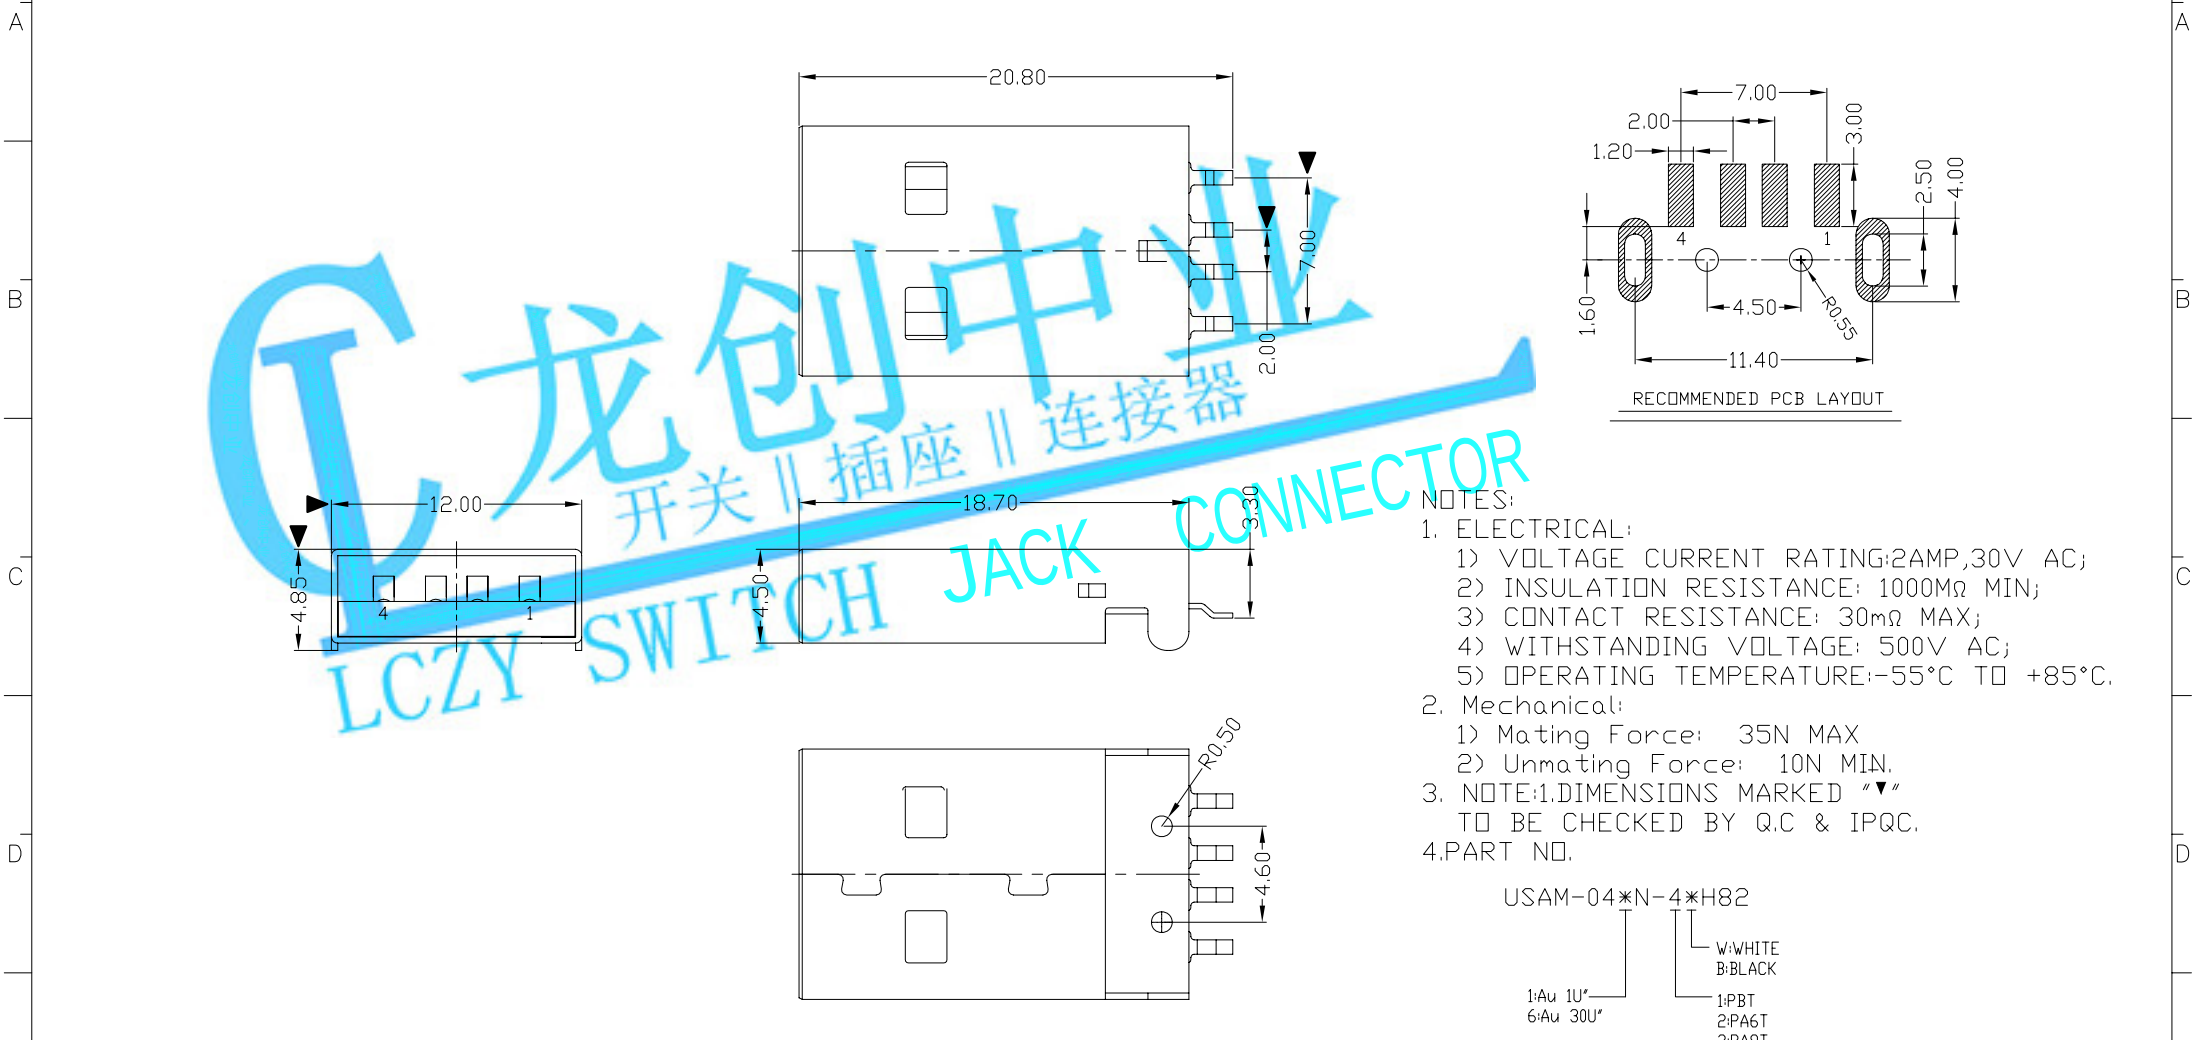

- NOTES:
1. ELECTRICAL:
1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
2) INSULATION RESISTANCE: 1000MΩ MIN;
3) CONTACT RESISTANCE: 30mΩ MAX;
4) WITHSTANDING VOLTAGE: 500V AC;
5) OPERATING TEMPERATURE: -55°C TO +85°C.
 2. Mechanical:
1) Mating Force: 35N MAX
2) Unmating Force: 10N MIN.
 3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
 4. PART NO.

USAM-04*N-4*H82

1: Au 10"
6: Au 30U"

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:										3FA71 4LCP			
3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.* ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
2	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X* ±1°	MAT'L						
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX*	SEE NOTE	TITLE:		PART NO.:			
					.XXX ±0.15	.XXX*	FINISH SEE NOTE	USB A/M 90° SMT短体 加长脚		USAM-04*N-4*H82			
								DR: gan 2012/7/03		DWG NO.:			
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	CHKD:	gan 2012/7/03		AII-H82			
							APPD:			SCALE	SHEET	REV.	CUSTOMER DRAWING
										1:1	1/1	B	