

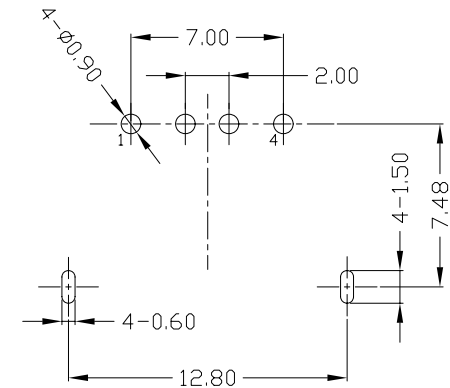
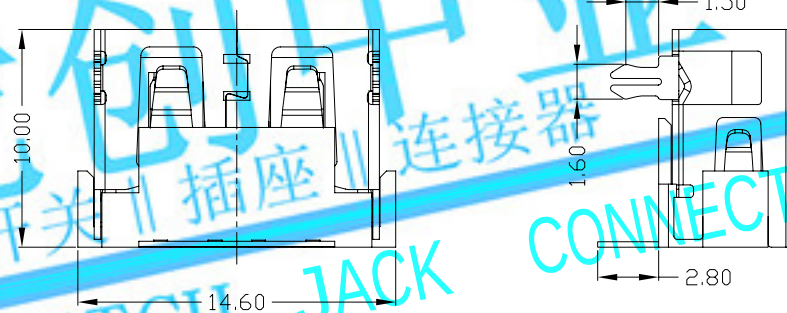





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

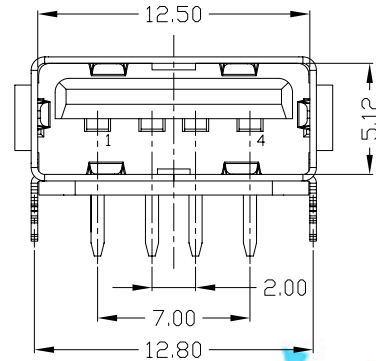

RECOMMENDED PCB LAYOUT

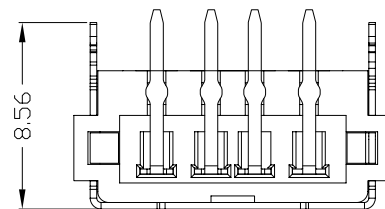

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩMIN;
- 3) CONTACT RESISTANCE: 30mΩMAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*R637

1: WHITE
2: BLACK
3: PBT
4: LCP

Bill of materials:

					X. ±0.35	X.* ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED							
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.3	.X* ±1°	MAT'L	TITLE: USB AF 10.0 DIP 90度 厚6.35 无卷边 两只前脚							
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XX ±0.25	.XX*	SEE NOTE						PART NO.: USAF-04*N-1*R637		
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH	DR: <i>gan</i> 2016/9/20							
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE						DWG NO.: AII-R637		
							Q'TY	CHKD: <i>gan</i> 2016/9/20							
								APPD:				SCALE	SHEET	REV.	CUSTOMER DRAWING
											1:1	1/1	B		