
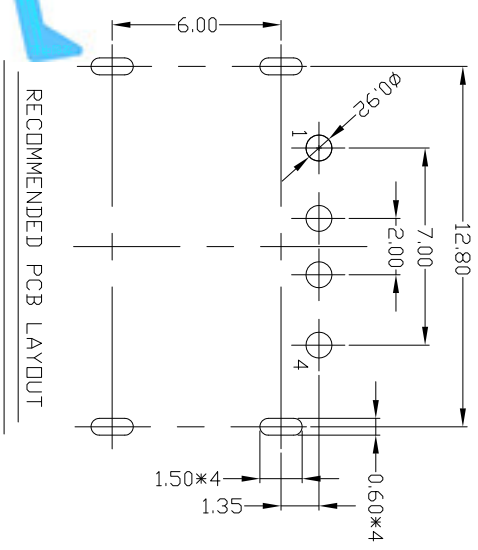
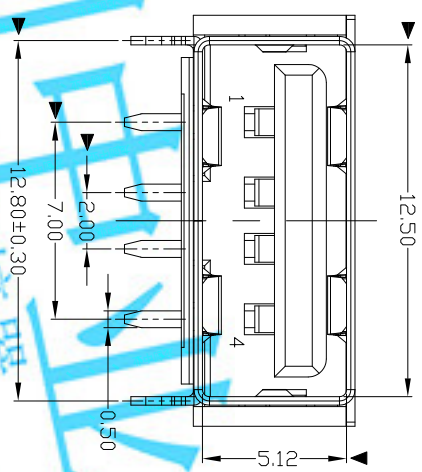


REV.	ECN.	NO.	APPD.

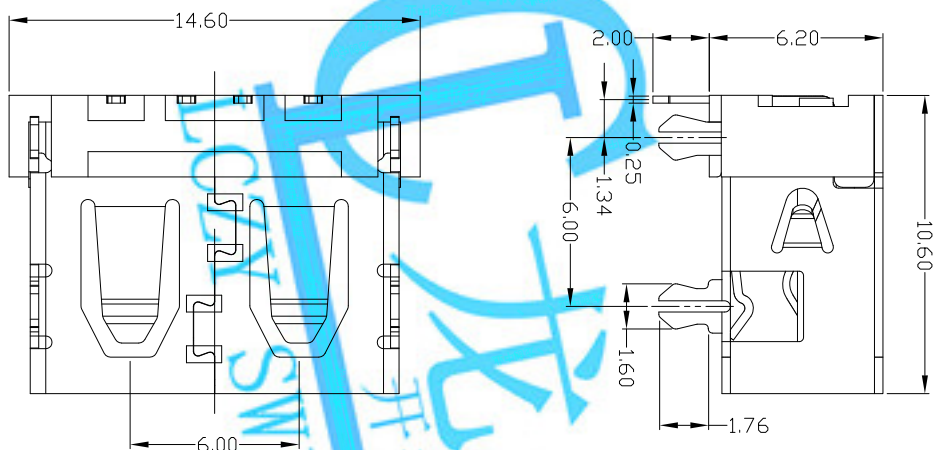

龙创中业
开关 || 插座 || 连接器
JACK || CONNECTOR

NOTES:
1. ELECTRICAL:
1) VOLTAGE CURRENT RATING:2AMP,30V AC;
2) INSULATION RESISTANCE: 1000MΩ MIN;
3) CONTACT RESISTANCE: 30mΩ MAX;
4) WITHSTANDING VOLTAGE: 500V AC;
5) OPERATING TEMPERATURE:-55°C TO +85°C.

4.PART NO.

2. Mechanical:
1) Mating Force: 35N MAX
2) Unmating Force: 10N MIN.

3. NOTE:1.DIMENSIONS MARKED "▼" TO BE
CHECKED BY Q.C & IPQC.

USAF-04*N-1*R808
1:AU 1U"
6:AU 30U"
W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

3	HOUSING	PBT/LCP	1	UL94V-0	X: ±0.35 X ±0.3	X: ±2° X: ±1°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25 .XXX ±0.15	.XX° .XXX°	SEE NOTE	TITLE:	PART NO.:	USAF-04*N-1*R808		
							FINISH	USB A/F 90度 短体鱼叉脚4脚 (10.6)				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN			SEE NOTE	DR:	DWG NO.:	A11-R808		
							Q'TY	CHKD: gan 2012/7/04				
ND	PARTS	MATERIAL	QTY	FINISHING				APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
								1:1	1/1	B		