

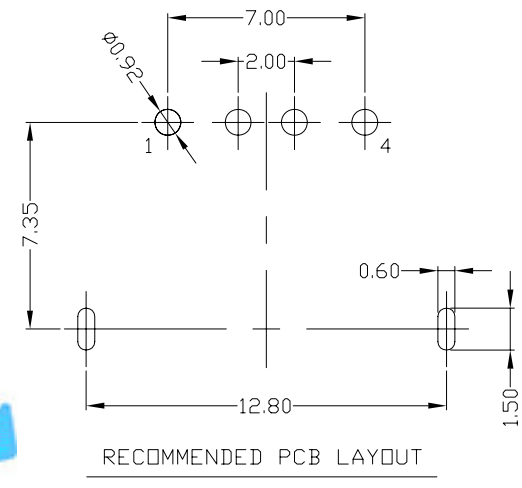


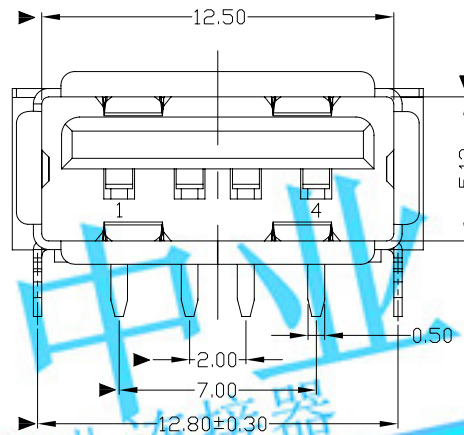

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

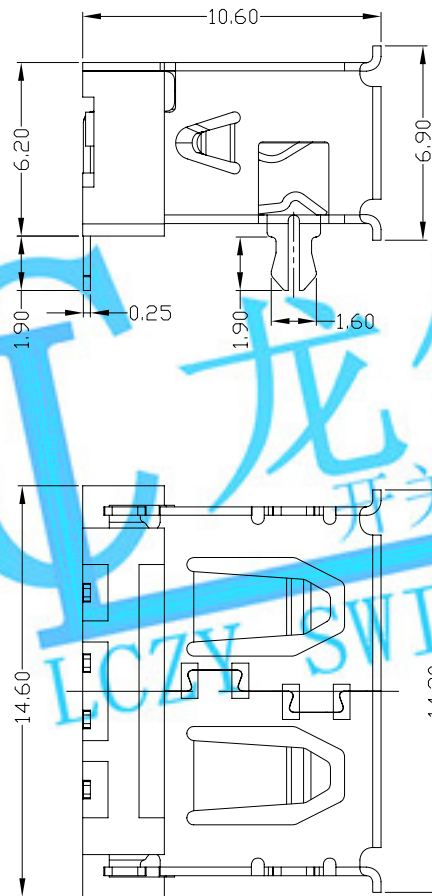

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*R810
W: WHITE
B: BLACK
1: Au 1U"
6: Au 30U"
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

3	HOUSING	PBT	1	UL94V-0	X. ±0.35	X.* ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
					.X ±0.3	.X.* ±1°	MAT'L						
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	SEE NOTE	TITLE: USB A/F 90度DIP 短体鱼叉脚(10.6)		PART NO.: USAF-04*N-1*R810			
					.XXX ±0.15	.XXX*	FINISH						
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	DR: <i>gan</i> 2012/7/03		DWG NO.: AII-R810			
							Q'TY	CHKD: <i>gan</i> 2012/7/03					
								APPD:					
NO	PARTS	MATERIAL	QTY	FINISHING				SCALE 1:1		SHEET 1/1	REV. B	CUSTOMER DRAWING	
1		2		3		4		5		6		7	