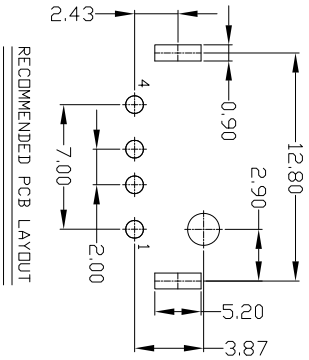




NOTES:

1. ELECTRICAL:
1) VOLTAGE CURRENT RATING:2AMP,30V AC;
2) INSULATION RESISTANCE: 1000MΩ MIN;
3) CONTACT RESISTANCE: 30mΩ MAX;
4) WITHSTANDING VOLTAGE: 500V AC;
5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
1) Mating Force: 35N MAX
2) Unmating Force: 7N MIN.
3. NOTE:1.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04*N-1*R07

- 1Au 1U"
6Au 30U"
- W:WHITE
B:BLACK
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

LONGCHUANG ZHONGYE (HK)CO.,LIMITED													
TITLE:					PART NO.:								
USB AP 短体 斜15度 平口					USAF-04*N-1*RU07								
DR: <i>yan</i> 2012/7/05					DWG NO.: A11-RU07								
CHKD: <i>yan</i> 2012/7/05													
					SCALE SHEET REV.								
					1:1 1/1 B CUSTOMER DRAWING								
NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm							
3	HOUSING	PBT	1	UL94V-0	MAT'L								
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	SEE NOTE								
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	FINISH								
					SEE NOTE								