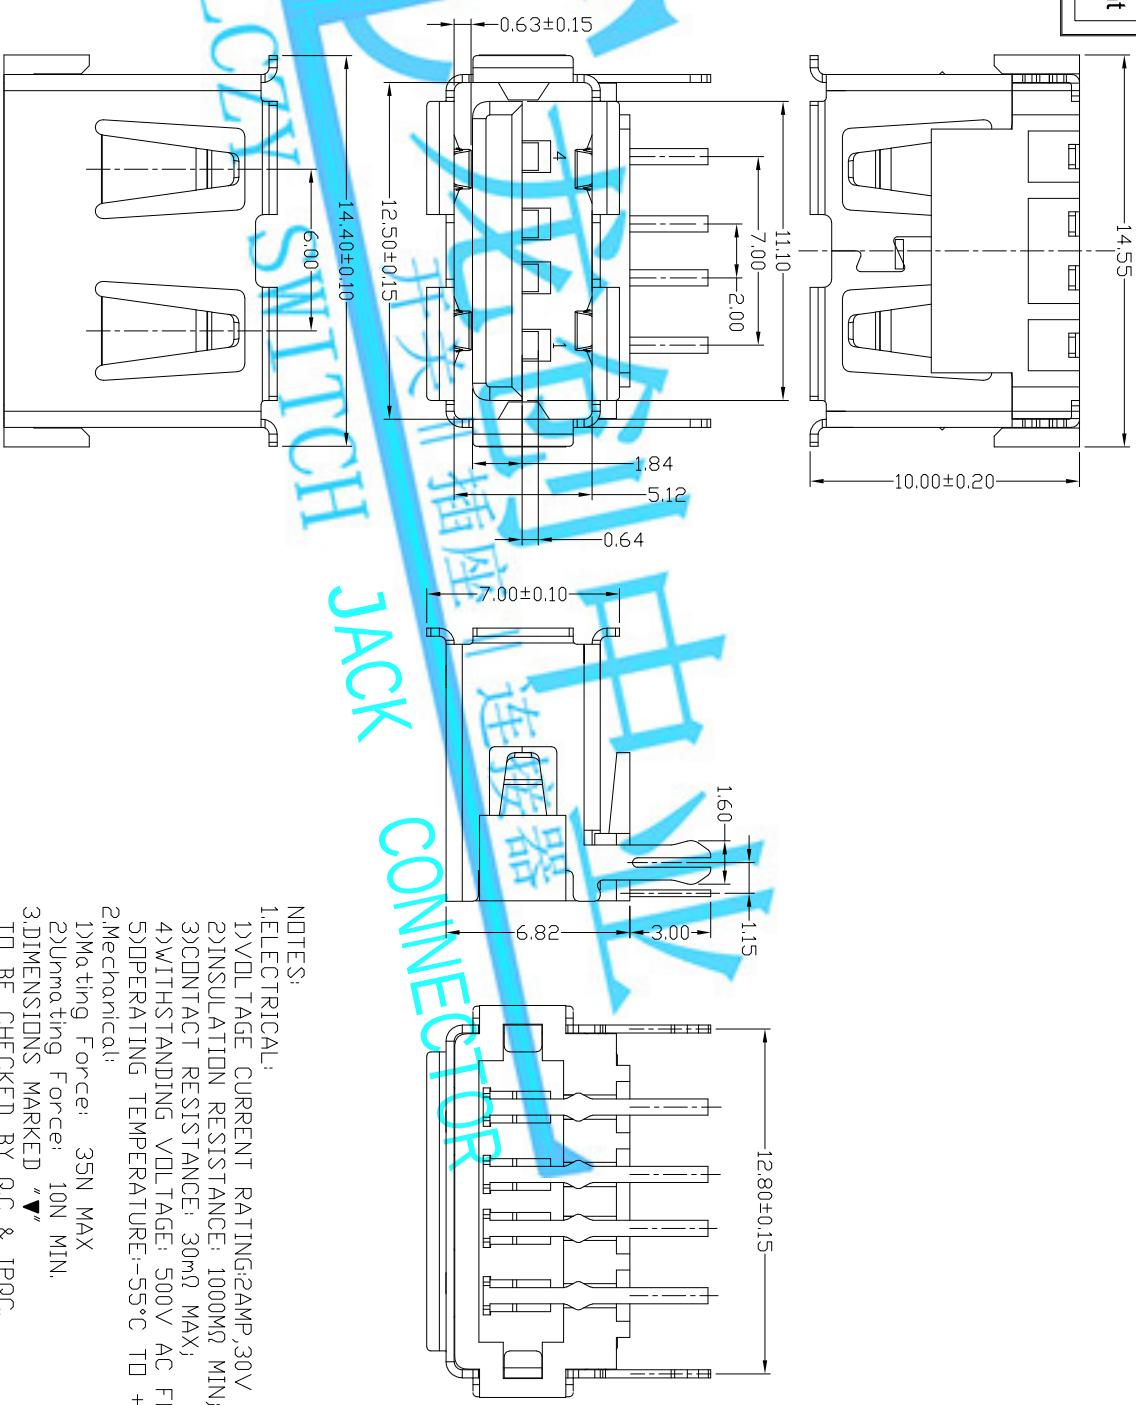


- NOTES:
- 1.ELECTRICAL:
 - 1)VOLTAGE CURRENT RATING:2AMP,30V AC;
 - 2)INSULATION RESISTANCE: 1000MΩ MIN;
 - 3)CONTACT RESISTANCE: 30mΩ MAX;
 - 4)WITHSTANDING VOLTAGE: 500V AC FOR 1MIN;
 - 5)OPERATING TEMPERATURE:-55℃ TD +85℃.
 - 2.Mechanical:
 - 1)Mating Force: 35N MAX
 - 2)Umating Force: 10N MIN.
 - 3.DIMENSIONS MARKED "▼" TD BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04*N-1*RU11

1AU 1U*
6AU 30U*

W/WHITE
B/BLACK

1PBT
2PPA6T
3PPA9T
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	SCALE	SHEET	REV.	CUSTOMER DRAWING
3	HOUSING	PBT+30%GF	1	UL94V-0	MAT'L		USB AIF DTP 90度 短体正向 卷边 后二脚 长脚3.0	USAF-04XN-1XRU11	1:1	1/1	A	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	SEE NOTE		DR: 2018/10/15					
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	SEE NOTE		CHKD: 2018/10/15					
ND	PARTS	MATERIAL	QTY	FINISHING	Q'TY		APPD: 2018/10/15					