

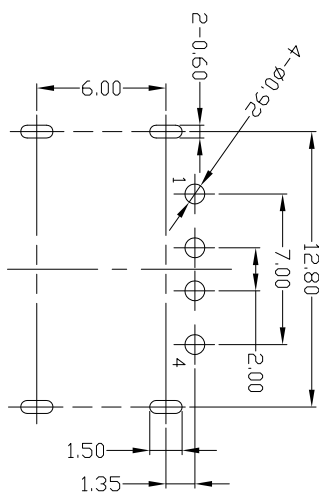

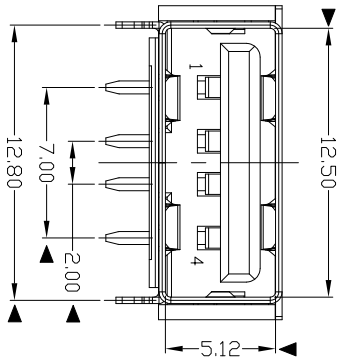
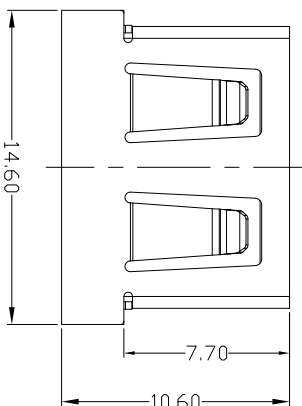
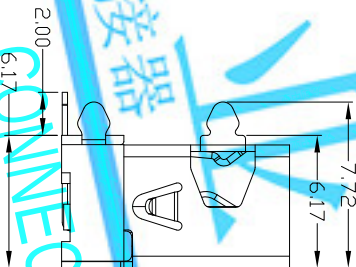


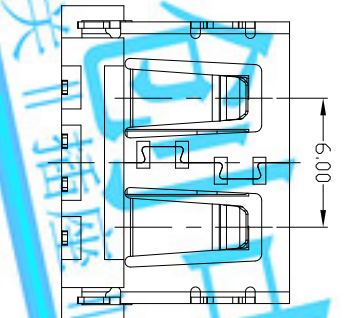

RECOMMENDED PCB LAYOUT



4.PART NO.

USAF-04*N-**R602

1Au 1U"
6Au 30U"
W:WHITE
B:BLACK
1PBT
2PAGT
3PA9T
4LCP

Bill of materials:

3	HOUSING	PBT/LCP	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
ND	PARTS	MATERIAL	QTY	FINISHING

X: ±0.35	X: ±2°	UNITS
X: ±0.3	X: ±1°	MATL
.XX ±0.25	.XX°	SEE NOTE
.XXX ±0.15	.XXX°	FINISH
SEE NOTE		QTY

LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
TITLE: USB A/F 90° DTP 短体 10.6		PART NO.:	
DR: gan 2012/6/29		USAF-04*N-**R602	
CHKD: gan 2012/6/29		DWG NO.:	
APPD:		SCALE SHEET REV. CUSTOMER DRAWING	
1:1		1/1 B	

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:2AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩMIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-55℃ TO +85℃.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE:1.DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK) CO., LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INVENTOR INC.