




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

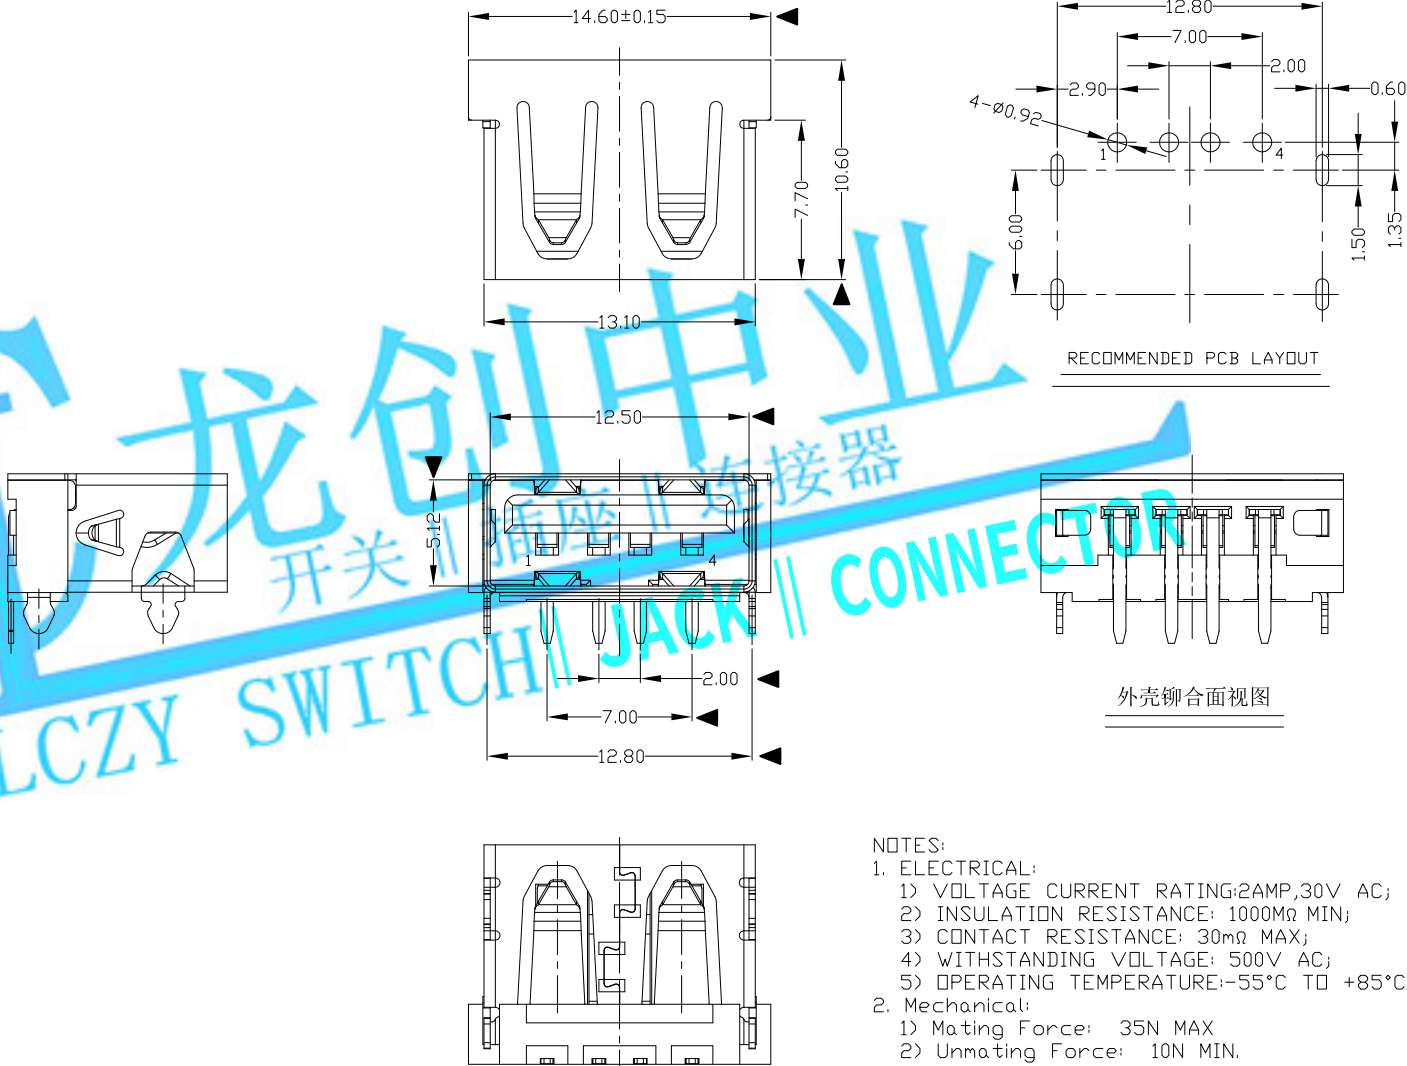

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-***R607

1: Au 1U"
6: Au 30U"

W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	mm	LONGCHUANG ZHONGYE (HK) CO., LIMITED			
3	HOUSING	PBT/LCP	1	UL94V-0	.X ±0.35	.X.* ±2*	MAT'L	SEE NOTE	TITLE: USB A/F 90° DIP 短体 (10.6) 弹片尖角形 DR: gan 2012/6/29 CHKD: gan 2012/6/29 APPD:			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX.*	FINISH	SEE NOTE				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX.*	Q'TY	SEE NOTE				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.					PART NO.: USAF-04*N-***R607			DWG NO.: AII-R607		SCALE: 1:1		
										SHEET: 1/1		
										REV.: B		
										CUSTOMER DRAWING		