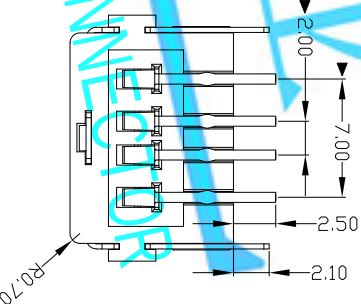
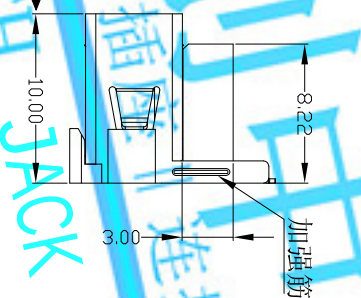
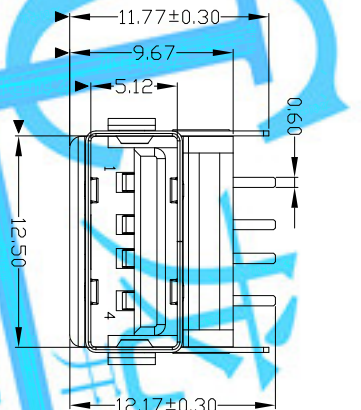



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
3	HOUSING	PBT	1	UL94V-0
4	CONDUCTOR	USAF-04*N-1*RU06		

- NOTES:
- ELECTRICAL:
 - VOLTAGE RATING:2AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-55℃ TO +85℃.
 - Mechanical:
 - Mating Force: 35N MAX
 - Umating Force: 7N MIN.
 - NOTE:1.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

REV	LTR	DESCRIPTION	DATE	REVISER	APPD