

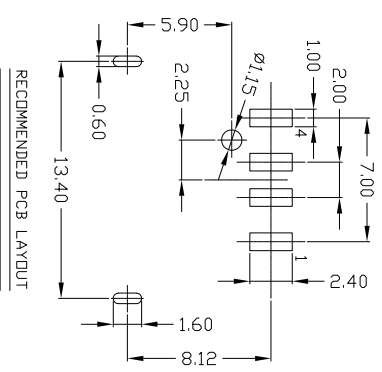








3	HOUSING	LCP+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

X: ±0.35	X': ±2"	UNITS	mm
X: ±0.3	X': ±1"	MAT'L	
.XX ±0.25	.XX'	SEE NOTE	
.XXX ±0.15	.XXX'	FINISH	
		SEE NOTE	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
TITLE:		PART NO.:	
USB AF SMT 10.0 反向单柱 无耳朵		USAF-04*N-4*V606	
DR: gsm 2014/12/10		DWG NO.:	
CHKD: gsm 2014/12/10		A11-V606	
APPD:		SCALE	SHEET
		1:1	1/1
		REV.	B
		CUSTOMER DRAWING	

Bill of materials:

- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING:2AMP,30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩMIN;
 - 3) CONTACT RESISTANCE: 30mΩMAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
 - 3. DIMENSIONS MARKED "▼" TD BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-4*V606

1Au 1u"
6Au 30u"

W/WHITE
B/BLACK
1PBT
2PA6T
3PA9T
4LCP