



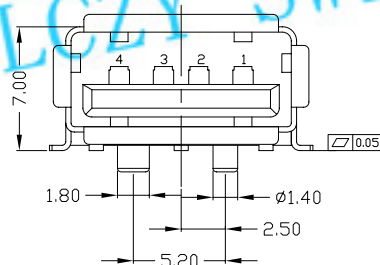

REV.	ECN.	NO.	APPD.

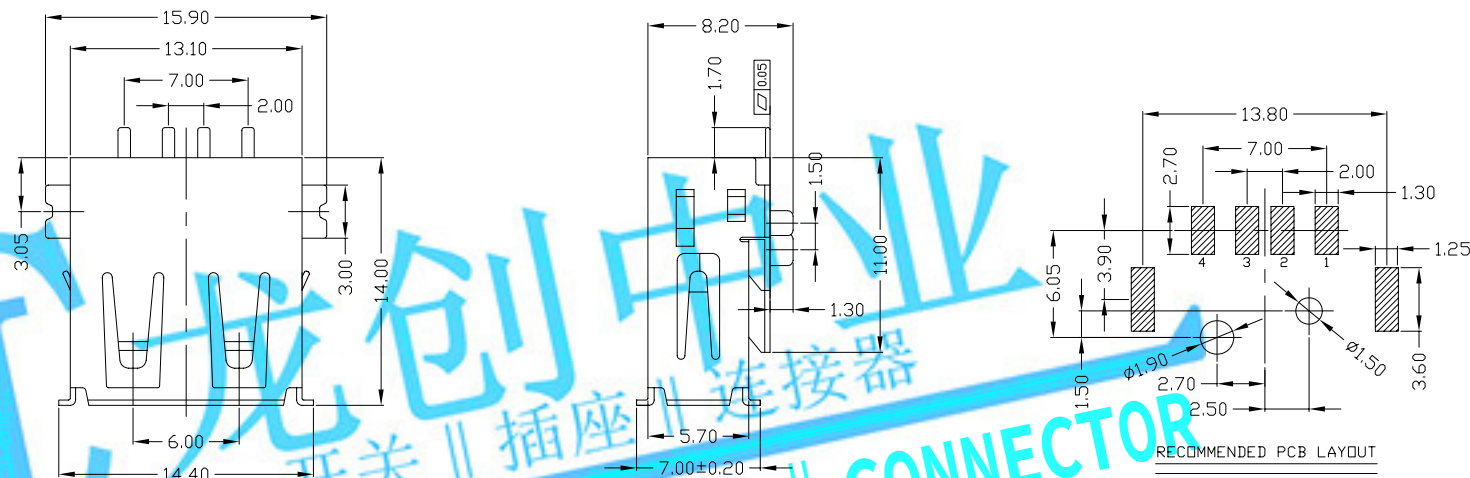


1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩMIN;
 - 3) CONTACT RESISTANCE: 30mΩMAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

USAF-04*N-2*V32

1:AU 1U*
6:AU 30U*

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:CP

					X. ± 0.35	X.* $\pm 2^*$	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
3	HOUSING	PA6T+30%GF	1	UL94V-0	.X ± 0.3	.X.* $\pm 1^*$	MAT'L					SEE NOTE
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ± 0.25	.XX.*	FINISH SEE NOTE	DR: <i>gan</i> 2014/09/20	DWG NO.: AII-V32			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ± 0.15	.XXX.*				Q'TY 	CHKD: <i>gan</i> 2014/09/20	SCALE 1:1
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.							