
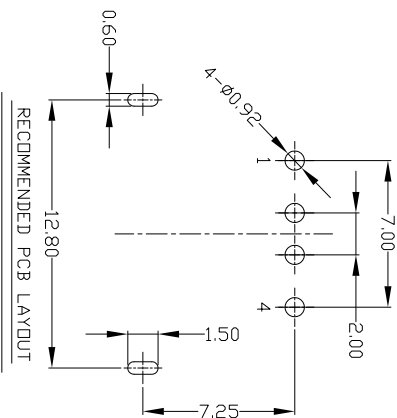
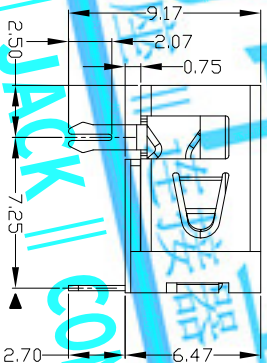
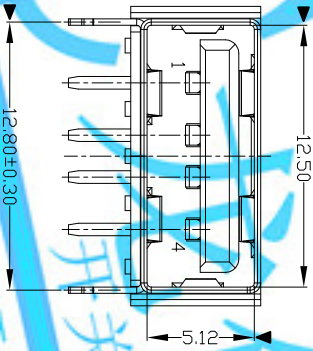



- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:2AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ/MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-55°C TD +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Umating Force: 10N MIN.
 - NOTE:1.DIMENSIONS MARKED " " TD BE CHECKED BY Q.C & IPQC.

4.PART ND.

USAF-04* N -1* R613

1Au 1u"
6Au 30u"

W/WHITE
B/BLACK

1PBT
2IPAET
3IPAET
4ILCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
3	HOUSING	PBT	1	UL94V-0	MATL		TITLE: USB AF DIP 90° (10.0)无卷边 DR: <i>gan</i> 2013/4/12 CHKD: <i>gan</i> 2013/4/12 APPD:
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	SEE NOTE		PART NO.: USAF-04* N -1* R613 DWG NO.: AII-R613
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	FINISH SEE NOTE	Q'TY	SCALE SHEET 1:1
ND	PARTS	MATERIAL	QTY	FINISHING			REV. B CUSTOMER DRAWING