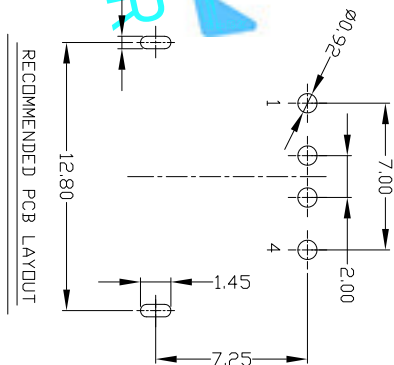
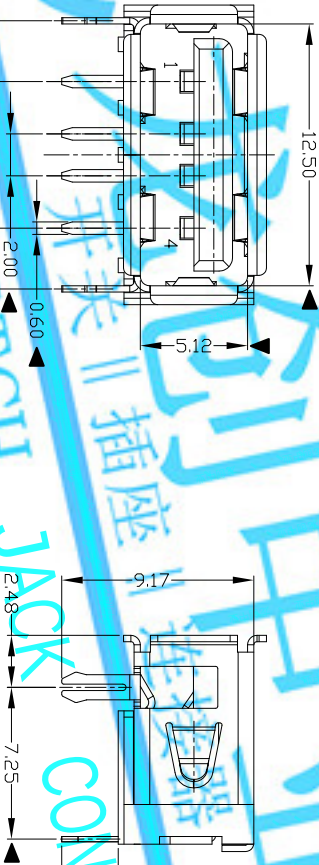



- NOTES:
1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ/MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
 3. NOTE: 1. DIMENSIONS MARKED " " TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*R614

14U 1U*
64U 30U*
V/WHITE
B/BLACK
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

3	HOUSING	PBT	1	UL94V-0	X: ±0.35	X: ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED		
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	X: ±0.30	X: ±1°	MAT'L			
					.XX ±0.25	.XX°	SEE NOTE			
					.XXX ±0.15	.XXX°	FINISH			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.			SEE NOTE		
ND	PARTS	MATERIAL	QTY	FINISHING		Q'TY		TITLE: USB AF DIP 90° (10.3) 卷边	PART NO.: USAF-04*N-1*R614	
								DR: gan 2013/4/12	DWG NO.: A11-R614	
								CHKD: gan 2013/4/12	SCALE SHEET REV.	CUSTOMER DRAWING
								APPD:	1:1 1/1 B	