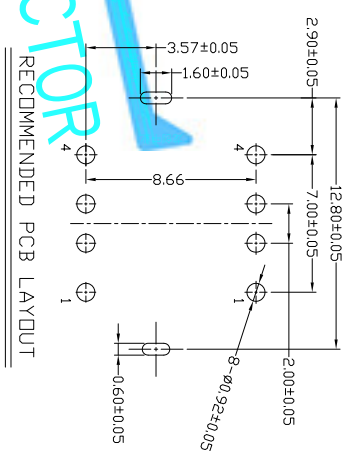
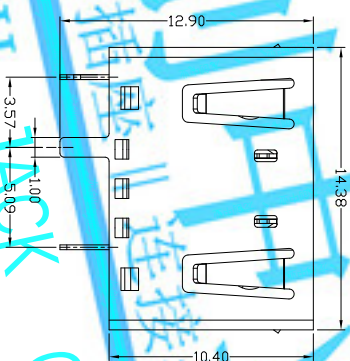
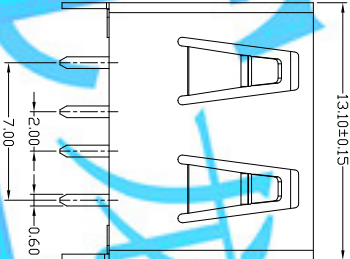
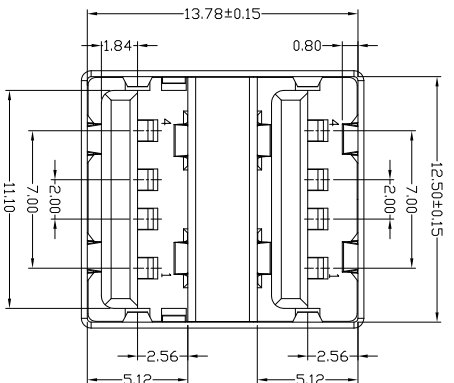


NOTES:

1.ELECTRICAL:

1)VOLTAGE CURRENT RATING:2AMP,30V AC;

2)INSULATION RESISTANCE: 1000MΩ MIN;

3)CONTACT RESISTANCE: 30mΩ MAX;

4)WITHSTANDING VOLTAGE: 500V AC FOR 1MIN;

5)OPERATING TEMPERATURE:-55°C TO +85°C.

2.Mechanical:

1)Mating Force: 35N MAX

2)umating Force: 10N MIN.

3)DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-08*N-1*PU02

1Au 1u"
6Au 30u"

W:WHITE
B:BLACK

1:PB
2:PA6T
3:PA9T
4:LCF

Bill of materials:

4	CLIP	STAINLESS STEEL	1		X: ±0.35	X: ±2°	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.30	.X° ±1°	MAT'L							
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX°	SEE NOTE							
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	.XXX ±0.15	.XXX°	FINISH							
ND	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC			Q'TY	DR: <i>Sticky</i> 2018/10/16	DWG NO.:	AII-PU02		CUSTOMER DRAWING	
									CHKD: <i>Sticky</i> 2018/10/16		SCALE	SHEET	REV.	
									APPD:		1:1	1/1	A	

REV.	ECN.	NO.	APPD.