


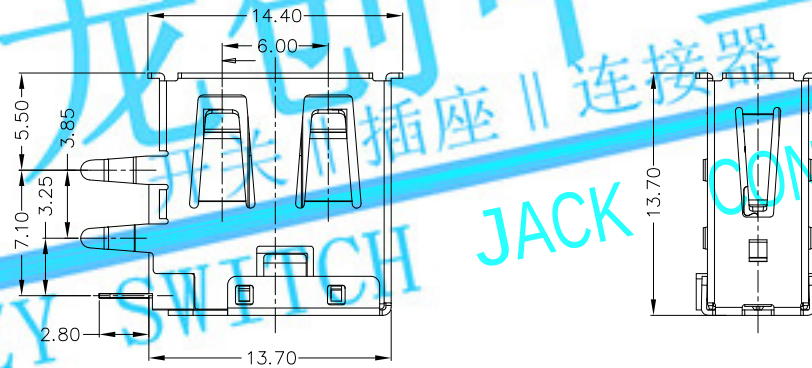





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

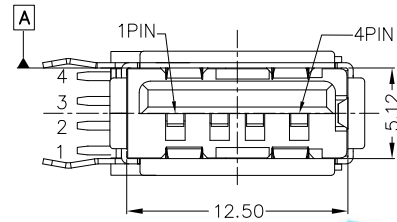

RECOMMENDED PCB LAYOUT

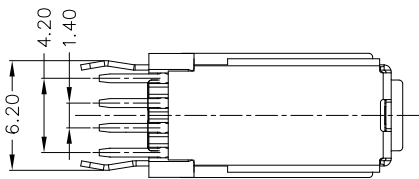

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩMIN;
- 3) CONTACT RESISTANCE: 30mΩMAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*C61
W: WHITE
B: BLACK
1: Au 1U"
6: Au 30U"
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

					X. ±0.35	X.* ±2*	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.3	.X* ±1*	SEE NOTE	TITLE: USB AF侧插短体13.7四只弯脚	PART NO.: USAF-04*N-1*C61			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*						
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH	DR: <i>gan</i> 2015/1/12	DWG NO.: All- C61			
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	SEE NOTE					
									CHKD: <i>gan</i> 2015/1/12	SCALE	SHEET	REV.
								APPD:		1:1	1/1	B