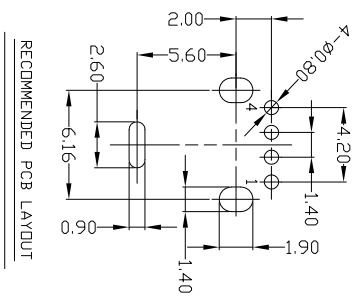
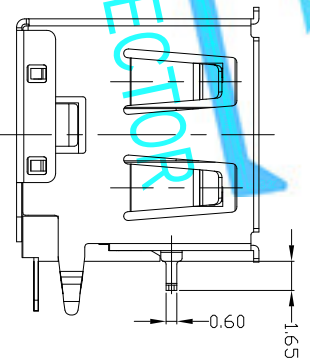

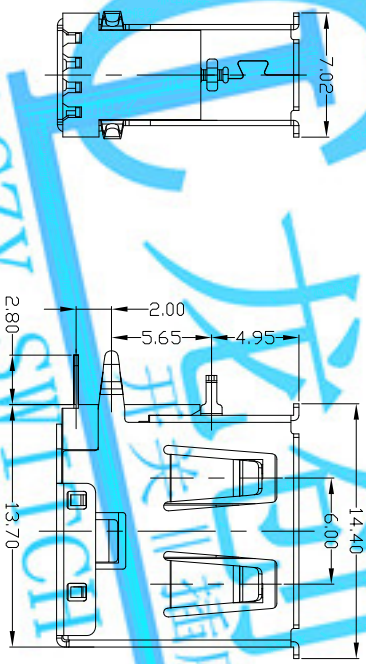

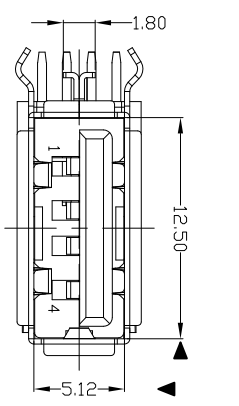


Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
4	BACK COVER	COPPER ALLOY	1	PLATED NICKEL	X: ±0.35	X: ±2°	TITLE: USB AF 90° DIP侧插三只脚 卷边 DR: <i>gan</i> 2014/6/18 CHKD: <i>gan</i> 2014/6/18 APPD: 1:1
3	HOUSING	PBT	1	UL94V-0	X: ±0.3	X: ±1°	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX°	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX°	
ND	PARTS	MATERIAL	QTY	FINISHING	SEE NOTE	SEE NOTE	PART NO.: USAF-04*N-1*C68
					SCALE 1:1	SHEET 1/1	REV. B
							CUSTOMER DRAWING

- NOTES:
- ELECTRICAL:
 - VOLTAGE RATING:2AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩMIN;
 - CONTACT RESISTANCE: 30mΩMAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART ND.

- USAF-04*N-1*C68
- 1Au 1U" W/WHITE
 - 6Au 30U" B/LACK
 - 1PBT 2PA6T 3PA9T 4LCP